


Electric Hydraulic Pump KLW4000 series

Stock Code	AQ04665
Model	KLW4000
Drive	Electric
Tank capacity	8L
Flow(low-mid-High)	7-1.6-0.8 L/min
Output pressure	40-700bar
Source of power	220V/50HZ
Power	1.1KW
Weight	26.7Kg
Volume (mm)	300x375x458

- Compact automatic three stage flow, max efficiency.
- Applicable on both one or two wrenches simultaneously.
- Aluminum oil tank with oil gauge and thermometer.
- Have Ø100 high pressure gauge.
- Infinitely variable pressure adjustment between 40-700 bar.
- With the high efficiency radiator the pump can work 24 dirtct hours.
- Can change the motor to fit the different current around the world
- You could change the export components(FP-4), driven four wrenches at the same time.

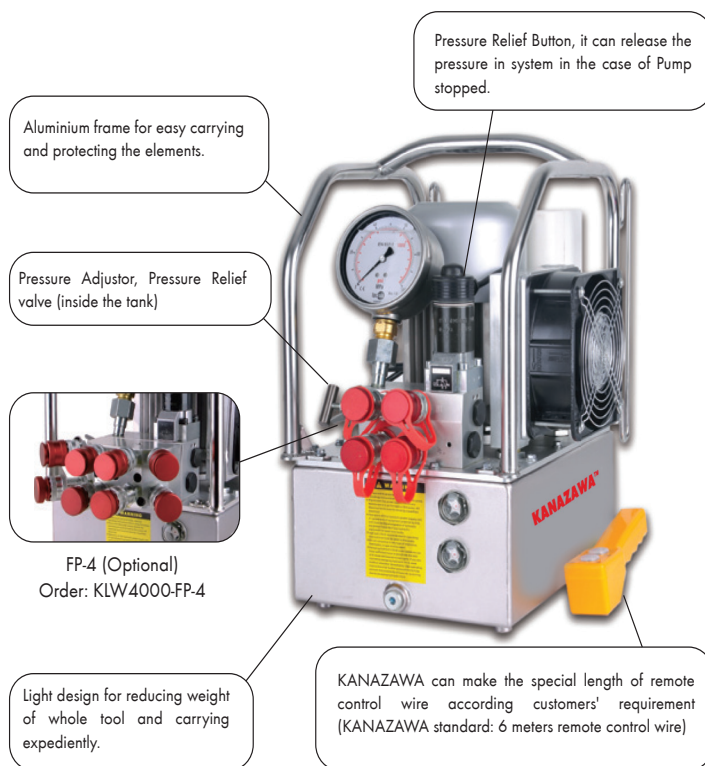


- Use where air (4-8 bar) is the preferred.
- Compact power there stages flow design.
- Applicable on both one or two wrenchs
- Aluminum oil tank with oil gauge and motor.
- Ø100 diameter pressure gauge.
- Infinitely variable pressure adjustment between 0-1000 0 psi
- With the high efficiency cooling system makes the pum p suitable in-extreme environment.
- You could change the export components (FP-4) ,dri ven four wrenches at the same time.

AQ04886 Pneumatic Hydraulic Pump

Model	Oil capacity (L)	Control retrun circuit	Air Moto (Power/Rotate Speed/ Pressure Output/ Air Input Value)	Power (Kw)	Flow (L/min)			Oil outlet connecting thread	oil retrun port connecting thread	Maxwork pressure (MPa)
					Low	Mid	High			
KLW4000N	7	E	Power1.1KW Rotate Speed 3000r/min Pressure Output5~8bar Air Input Value≥ 1.9m3/min	1.1	7	1.6	0.8	NPT1/4	NPT1/4	70

Hydraulic Hoses for Wrench

Stock Code	Model	Model & photograph		Max operating pressure(Mpa)	Hose end		Hose length (m)
					end one	end two	
AQ04659	2JH6445-1	2JH64 Series twin hydraulic hose		72	1/4"NPT	1/4"NPT	4.5
AQ04660	2JH6460-1						6

KANAZAWA

ALLINTON ENGINEERING & TRADING PTE LTD

318 331 Jalan Besar Singapore 208983
T65 6296 0679 W allinton.com.sg E sales@allinton.com.sg