



## RRH series Double-Acting Hollow Plunger Cylinder



Capacity:30 ~ 150Ton  
Stroke:38~258mm  
Maximum Operating Pressure:700bar

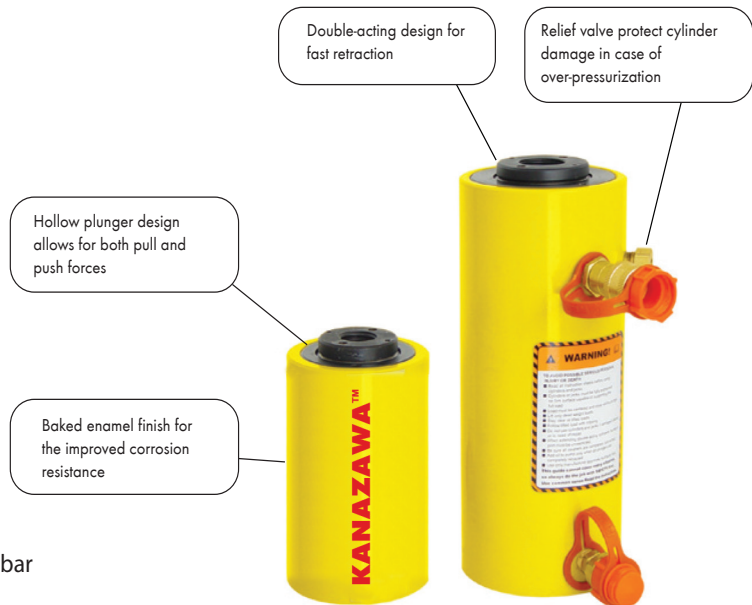

### RRH Series Selection Chart

Stock Code	Model	Capacity (Ton)		Stroke (mm)	Min Height (mm)	Outside Diameter (mm)	Effective Area (cm <sup>2</sup> )		Oil Capacity (cm <sup>3</sup> )		Plunger Diameter (mm)	Hollow Diameter (mm)	Weight (Kg)
		Push	Pull				Push	Pull	Push	Pull			
AQ00390-K	RRH307	30	23	178	330	114	46.6	30.4	829	541	63.5	33.3	21
AQ04902-K	RRH3010	30	23	258	431	114	46.6	30.4	1202	784	63.5	33.3	27
AQ04903-K	RRH603	60	42	89	247	159	82.3	54.2	733	482	91.9	53.8	28
AQ00391-K	RRH606	60	42	166	323	159	82.3	54.2	1366	900	91.9	53.8	35
AQ00392-K	RRH6010	60	42	257	438	159	82.3	54.2	2115	1393	91.9	53.8	45
AQ00393-K	RRH1001	100	68	38	165	212	133.0	87.4	505	333	127.0	79.2	33
AQ04904-K	RRH1003	100	68	76	254	212	133.0	87.4	1011	666	127.0	79.2	61
AQ00394-K	RRH1006	100	68	153	342	212	133.0	87.4	2035	1337	127.0	79.2	79
AQ04905-K	RRH-10010	100	68	257	460	212	133.0	87.4	3420	2246	127.0	79.2	106
AQ04906-K	RRH-1508	150	75	203	349	247	204.1	102.6	4144	2083	152.4	79.2	111