


Onishi Explosion Proof Fan

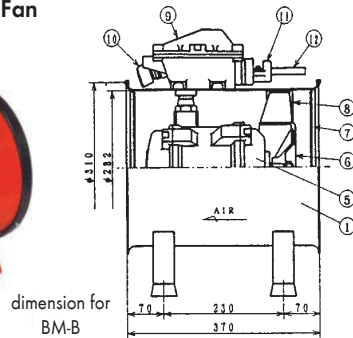

Features

1. The Lightest Weight: BM-B—25 KG
BB-B —14.5 KG
2. Safety: Exp. Proof Grade d2G4. Non-Sparking Type
3. Useful: Fitting with a Exp. Proof Switch Cabtire.
Cable 5M Length


Particulars

Stock Code	Type	Dia:mm	Output	Source	Quantity	Pressure	Weight
AS00008	BM-B	300	0.55kW 1 Ø 50 / 60Hz	AC100V	70m³/min	30mmAq	25kg
AS00009	BB-B	200	0.18kW	AC230V	20m³/min	20mmAq	14kg

WIND YAMA

WIND YAMA WEV 400 16" and WEV 600 21" variable speed turbo blowers offer more power, higher performance, no CO and are GFCI-compatible, too!

- You Control The 1.5HP Force
From full PPV for fast clearance of dangerous smoke and gases to slower speeds for cooling overheated firefighters is as easy as turning the control knob on the control panel.
- IntelliSense™ Controls The Start Up Power
This exclusive water-resistant electronic control feature monitors and limits the amount of start up power to allow operation on GFCI Circuits and for starts on generators as small as 2kW.

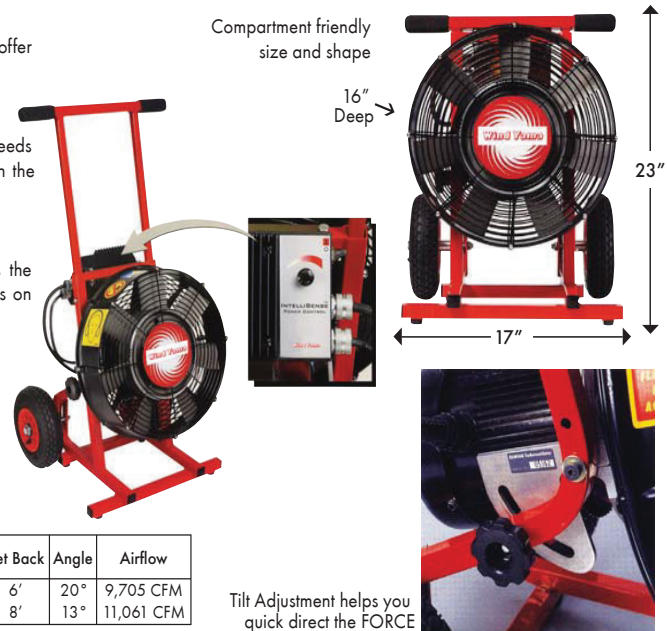

Specifications

Stock Code	Model No.	HP	Dimensions	Motor MFG/ Model No.	Wt	RPM	Set Back	Angle	Airflow
AS00355	WEV400-16"	1.5	23H x 17W x 16D	YM-EM-F1.5-90	74	3588	6'	20°	9,705 CFM
AS00356	WEV600-21"	1.5	24H x 18W x 24D	YM-EM-F1.5-90	80	3588	8'	13°	11,061 CFM

Tilt Adjustment helps you quick direct the FORCE

Wind Yama Portable Ventilator



AP-200
Portable Ventilator
Size: 8"
Rotation: 3460rpm
HP: 150W
Voltage: Single Phase 110V, 220V
Three Phase 220V, 380V

AS00003




AP-300
Portable Ventilator
Size: 12"
Rotation: 3460rpm
HP: 550W
Voltage:
Single Phase 110V, 220V
Three Phase 220V, 380V

AS00004

Features

1. Aluminium blades compact in size, easy to operate.
2. Single-phase condensor motor eliminates the problems of over-heating of three-phase motors.
3. Aluminium blades have been subject to balance correction with computer.



For Use In

1. Underground tunnels shipyards honeycombed locales & narrow places.
2. To suck away toxic gases when welding and keep air fresh.
3. Perfect for storage compartments, warehouse and electric cable construction sites.

Stock Code	Model No.	Weight	Voltage	P	Hz	m³/min	m/Aq	r.p.m	pH	kg
AS00003	AP-200	150	110 & 220	2	50	25	35	2.930	1pH	10.3
					60	30	42	3460		
					50	60	40	2.930		
AS00004	AP-300	550	110 & 220	2	60	70	50	3460	1pH	19.7
					60	70	50	3460		