

Trolley & Castor

NB Series – 150kg 330Lb.



| Model No. | Stock Code | Loading Face | Floor Height | Handle Height | Net Weight | Loading Capacity | Caster | Starting Resistance |
|-----------------------|------------|---|---------------------------------------|--|-----------------|------------------|--------------------------------------|---------------------|
| NB-101 | AO00001 | 740 x 480 ^m / _m 29" x 19" ^m | 140 ^m / _m (5½") | 830 ^m / _m (32¾") | 12.5kg (27.5Lb) | 150kg (330Lb) | 100 ^m / _m (4") | 2.6kg (5.7Lb) |
| NB-102 | AO00002 | | | 840 ^m / _m (33") | 11.5kg (25.5Lb) | | | |
| NB-104 | AO00003 | | | 20kg (44Lb) | | | | |
| NB-105 | AO00004 | | | 850 ^m / _m (33½") | 27kg (59.5Lb) | | | |
| NB-107 | AO00005 | | | 19.7kg (43.4Lb) | | | | |
| NB-109 (With Stopper) | AO00006 | | | 830 ^m / _m (32¾") | 14.5kg (31.9Lb) | | | |

* Specification are subject to change without notice.

NF Series – 300kg 660Lb.



| Model No. | Stock Code | Loading Face | Floor Height | Handle Height | Net Weight | Loading Capacity | Caster | Starting Resistance |
|-----------------------|------------|--|---------------------------------------|--|-----------------|------------------|--------------------------------------|---------------------|
| NF-301 | AO00007 | 920 x 610 ^m / _m 36¼" x 24" ^m | 210 ^m / _m (8¼") | 870 ^m / _m (34¼") | 22.5kg (49.5Lb) | 300kg (660Lb) | 130 ^m / _m (5") | 3.1kg (6.8Lb) |
| NF-302 | AO00008 | | | 21kg (46Lb) | | | | |
| NF-303 | AO00009 | | | 880 ^m / _m (34½") | 24.5kg (54Lb) | | | |
| NF-304 | AO00010 | | | 34kg (75Lb) | | | | |
| NF-305 | AO00011 | | | 930 ^m / _m (36½") | 45kg (99Lb) | | | |
| NF-307 | AO00012 | | | 920 ^m / _m (36¼") | 32.5kg (71.5Lb) | | | |
| NF-308 (With Hook) | AO00013 | | | 870 ^m / _m (34¼") | 24kg (53Lb) | | | |
| NF-309 (With Stopper) | AO00014 | | | | | | | |

* Specification are subject to change without notice.

FL Series – 300kg 660Lb.



| Model No. | Stock Code | Loading Face | Floor Height | Handle Height | Net Weight | Loading Capacity | Caster | Starting Resistance |
|-----------|------------|--|--|---------------------------------------|-----------------|------------------|--------------------------------------|---------------------|
| FL-362 | AO00018 | 1210 x 610 ^m / _m | 210 ^m / _m (8½") | 880 ^m / _m (34") | 27.5kg (60.5Lb) | 300kg (660Lb) | 130 ^m / _m (5") | 3.1kg (6.8Lb) |
| FL-363 | AO00019 | 48 x 24" ^m | | | 30.5kg (67Lb) | | | |
| TR-101 | AO00016 | 715 X 460 " ^m | 135 ^m / _m (4 1/4") | 825 " ^m (32 1/2") | 11.5 kg (25Lb) | 150 kG (330 lb) | 100 % (4") | 2.6 kg (5.7 lb) |
| TR-102 | AO00017 | 28 1/4" X 18 1/4" | | 835 " ^m (33") | 10.5 kg (23Lb) | | | |

* Specification are subject to change without notice.

Trolley & Castor

NG Series – 500kg 1100Lb. (8" Caster) / 400 kg 880Lb. (6" Caster)



| Model No. | Stock Code | Loading Face | Floor Height | Handle Height | Net Weight | Loading Capacity | Caster | Starting Resistance |
|-----------------------|------------|--------------|---|---|--------------|------------------|--------------------------------------|---------------------|
| NG-401 | AO00020 | 8" | 290 ^m / _m (11 1/2") | 855 ^m / _m (33 1/2") | 44kg (97Lb) | 500kg (1100Lb) | 200 ^m / _m (8") | 5.7kg (12.6Lb) |
| | | 6" | 235 ^m / _m (9 1/4") | 800 ^m / _m (31 1/2") | 39kg (90Lb) | 400kg (880Lb) | 150 ^m / _m (6") | 3.8kg (8.4Lb) |
| NG-402 | AO00021 | 8" | 290 ^m / _m (11 1/2") | 880 ^m / _m (34 3/4") | 43kg (95Lb) | 500kg (1100Lb) | 200 ^m / _m (8") | 5.7kg (12.6Lb) |
| | | 6" | 235 ^m / _m (9 1/4") | 825 ^m / _m (32 1/2") | 38kg (84Lb) | 400kg (880Lb) | 150 ^m / _m (6") | 3.8kg (8.4Lb) |
| NG-403 | AO00022 | 8" | 290 ^m / _m (11 1/2") | 880 ^m / _m (34 3/4") | 49kg (108Lb) | 500kg (1100Lb) | 200 ^m / _m (8") | 5.7kg (12.6Lb) |
| | | 6" | 235 ^m / _m (9 1/4") | 825 ^m / _m (32 1/2") | 44 (97Lb) | 400kg (880Lb) | 150 ^m / _m (6") | 3.8kg (8.4Lb) |
| NG-407 | AO00023 | 8" | 290 ^m / _m (11 1/2") | 980 ^m / _m (38 1/2") | 62kg (137Lb) | 500kg (1100Lb) | 200 ^m / _m (8") | 5.7kg (12.6Lb) |
| | | 6" | 235 ^m / _m (9 1/4") | 925 ^m / _m (36 1/2") | 57kg (126Lb) | 400kg (880Lb) | 150 ^m / _m (6") | 3.8kg (8.4Lb) |
| NG-408 (With Hook) | AO00024 | 8" | 290 ^m / _m (11 1/2") | 880 ^m / _m (34 3/4") | 46kg (101Lb) | 500kg (1100Lb) | 200 ^m / _m (8") | 5.7kg (12.6Lb) |
| | | 6" | 235 ^m / _m (9 1/4") | 825 ^m / _m (32 1/2") | 41kg (90Lb) | 400kg (880Lb) | 150 ^m / _m (6") | 3.8kg (8.4Lb) |
| NG-409 (With Stopper) | AO00025 | 8" | 290 ^m / _m (11 1/2") | 880 ^m / _m (34 3/4") | 47kg (104Lb) | 500kg (1100Lb) | 200 ^m / _m (8") | 5.7kg (12.6Lb) |
| | | 6" | 235 ^m / _m (9 1/4") | 825 ^m / _m (32 1/2") | 42kg (93Lb) | 400kg (880Lb) | 150 ^m / _m (6") | 3.8kg (8.4Lb) |

* Specification are subject to change without notice.



TF Series – 400kg 880Lb

| Model No. | Stock Code | Loading Face | Floor Height | Handle Height | Net Weight | Loading Capacity | Caster | Starting Resistance |
|-----------|------------|---------------------------------------|--|---------------------------------------|-------------|------------------|--------------------------------------|---------------------|
| TF-402 | AO00026 | 300 x 600 ^m / _m | 220 ^m / _m (8 3/4") | 860 ^m / _m (34") | 24kg (53Lb) | 400kg (880Lb) | 130 ^m / _m (5") | 3.1kg (6.8Lb) |

PG Series – 300kg 1300Lb 8"


| Model No. | Stock Code | Loading Face | Floor Height | Handle Height | Net Weight | Loading Capacity | Caster | Starting Resistance |
|-----------|------------|--|--|---|--------------|------------------|--------------------------------------|---------------------|
| PG-502 | AO00028 | 1230 x 780 ^m / _m | 32 ^m / _m (12 1/2") | 865 ^m / _m (34") | 45kg (99Lb) | 600kg (1320Lb) | 200 ^m / _m (8") | 6.6kg (14.8Lb) |
| PG-503 | AO00029 | 48 1/2 x 30 3/4" | | 865 ^m / _m (12 1/2") | 51kg (112Lb) | | | |

Trolley & Castor

Rigid Caster Wheel



Swivel Caster Wheel

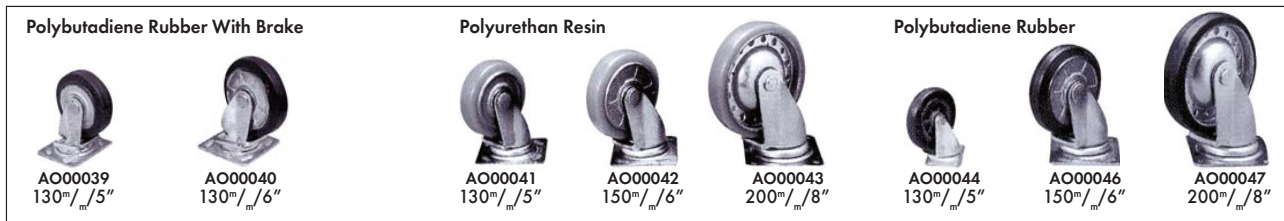


HX1400 Extra Heavy Duty Swivel Castor

Faultless Series

H1400 Heavy Duty

- Top Plate: Extra-thick $\frac{5}{16}$ " heated-treated carbon steel.
- Yoke Base: Cold-forged $\frac{1}{4}$ " steel notched for optional 4-position lock.
- Main Load Bearing: Fully hardened $\frac{7}{16}$ " ball bearing.
- Thrust Load Bearing: Fully hardened, $\frac{5}{16}$ " ball bearings.
- Kingpin: Heavy-duty $\frac{3}{4}$ "-dia. bolt-and-nut construction.
- Wheel Bearings: Fully hardened industrial-grade roller bearings.



HX3400 Heavy Duty Rigid Castor


Series H3400 Rigid Caster

- Heavy-Duty Axle: Solid (1/2" & 1") diameter axle with lock-nut for quick, easy wheel replacement.
- Pressure Lubrication Fittings are standard for both swivel raceway and wheel bearings.
- Finish: Zinc-plated for corrosion protection.

AO00056




| Wheel Size (In.) | Tread Width (In.) | Wheel Type | Bearing Type | Axle Size (In.) | Load Capacity (Kg) | Overall Height (In.) | Swivel Radius (In.) | HX1400 Extra Heavy duty castor Stock Code | Side Brake Number | HX3400 Heavy Duty Rigid Castor Stock Code | |
|------------------|-------------------|-------------------------|-------------------------|-----------------|--------------------|----------------------|---------------------|---|-------------------|---|---------|
| 6 | 2 1/2 | Semi-Steel | Roller | 1 | 2500 | 8 | 5 3/8 | AO00048 | H1406-6X2SB | AO00056 | |
| | | Duo-Tred (Polyurethane) | | | 1650 | | | | H1438-6X2SB | | |
| | | Plaskite (Phenolic) | | | 1600 | | | | H1431-6X2SB | | |
| | | Vulc. Rubber | | | 600 | | | | H1418-6X2SB | | |
| | 3 | Semi-Steel | Roller | 1 | 2500 | 8 | 5 3/8 | AO00049 | H1406-6X2 1/2SB | AO00057 | |
| | | Duo-Tred (Polyurethane) | | | 2100 | | | | H1438-6X2 1/2SB | | |
| | | Plaskite (Phenolic) | | | 1500 | | | | H1431-6X2 1/2SB | | |
| | | Vulc. Rubber | | | 600 | | | | H1418-6X2 1/2SB | | |
| | 8 | 2 1/2 | Semi-Steel | Roller | 1 | 2500 | 10 1/8 | 6 5/8 | AO00050 | H1406-8X2SB | AO00058 |
| | | | Duo-Tred (Polyurethane) | | | 2100 | | | | H1438-8X2SB | |
| | | | Plaskite (Phenolic) | | | 1400 | | | | H1431-8X2SB | |
| | | | Vulc. Rubber | | | 600 | | | | H1418-8X2SB | |
| 3 | | Semi-Steel | Roller | 1 | 1500 | 10 1/2 | 6 5/8 | AO00051 | H1406-8X2 1/2SB | AO00059 | |
| | | Duo-Tred (Polyurethane) | | | 1500 | | | | H1431-8X2 1/2SB | | |
| | | Plaskite (Phenolic) | | | 1500 | | | | H1431-8X2 1/2SB | | |
| | | Vulc. Rubber | | | 800 | | | | H1418-8X2 1/2SB | | |
| 10 | | 2 1/2 | Semi-Steel | Roller | 1 | 2500 | 12 1/2 | 7 5/8 | AO00052 | H1406-10X2SB | AO00060 |
| | | | Duo-Tred (Polyurethane) | | | 2500 | | | | H1438-10X2SB | |
| | | | Plaskite (Phenolic) | | | 1400 | | | | H1431-10X2SB | |
| | | | Vulc. Rubber | | | 600 | | | | H1418-10X2SB | |
| | 3 | Semi-Steel | Roller | 1 | 1500 | 12 1/2 | 7 5/8 | AO00053 | H1406-10X2 1/2SB | AO00061 | |
| | | Duo-Tred (Polyurethane) | | | 1500 | | | | H1438-10X2 1/2SB | | |
| | | Plaskite (Phenolic) | | | 1500 | | | | H1431-10X2 1/2SB | | |
| | | Vulc. Rubber | | | 800 | | | | H1406-10X2 1/2SB | | |



Options
Cam-Style Brake: All Wheel Sizes.
Four-Position Lock: Bolt-on for easy installation.

| HX1400 Extra Heavy Duty Castor | | HX3400 Heavy Duty Rigid Castor | |
|--------------------------------|--------------|--------------------------------|--------------|
| Stock Code | Size | Stock Code | Size |
| AO00054 | 12" x 2-1/2" | AO00062 | 12" x 2-1/2" |
| AO00055 | 12" x 3" | AO00063 | 12" x 3" |



Four Position Swivel Lock is available with all wheel sizes. Bolt-on design makes it addable, detachable and movable.



Cam-Style Wheel Brake is available with all wheel sizes. Simply step down to set, step again to release. See specifications to order.

Trolley & Castor

Super Heavy Duty Castor

| Dia (In.) | Wheel | | Capacity (Pounds) | Overall Height (In.) | ++ Approx. Weight (Pounds) | Caster Number + | | |
|-----------|-------------|-------------|-------------------|----------------------|----------------------------|-----------------|------------------------|-------------|
| | Width (In.) | Type | | | | Roller Bearing | Tapered Roller Bearing | |
| 6 | 3 | Drop Forged | 17000 | 9 | 60-1/4 | 95-FS-06501 | 95-FH-06509 | |
| | | Drop Forged | 5500 | | 59-1/2 | | 95-FS-06509 | |
| | | Drop Forged | 10000 | | 59-1/2 | | 95-TL-06809 | |
| | 5 | Laminated | 8000 | | 49-3/4 | | 95-FH-08709 | |
| 8 | 4 | Drop Forged | 17000 | 11 | 72-1/2 | 95-FS-08701 | 95-FH-08709 | |
| | | Drop Forged | 8350 | | 61-1/2 | | 95-FS-08709 | |
| | | Drop Forged | 10000 | | 61-1/2 | | 95-PY-08701 | |
| | | | Alathane | 3500 | | 63 | | 95-PY-08709 |
| | | 5 | Laminated | 6250 | | 54 | | 95-TL-08909 |
| | | | Textile | 5000 | | 54-1/2 | | 95-TM-08909 |
| 10 | 3 | Drop Forged | 6000 | 13 | 78-1/2 | 95-FH-10501 | 95-FS-10509 | |
| | | Drop Forged | 6500 | | 78-1/2 | | 95-MR-10509 | |
| | | Moldon | 1000 | | 57 | | 95-FH-10709 | |
| | | 4 | Drop Forged | 17000 | | 86-1/4 | 95-FS-10701 | 95-FS-10709 |
| | Drop Forged | | 8350 | 89-1/2 | 95-FS-10709 | | | |
| | Drop Forged | | 10000 | 89-1/2 | 95-PY-10701 | | | |
| | | | Alathane | 4200 | | 71 | | 95-PY-10709 |
| | | | Moldon | 1400 | | 64-3/4 | | 95-TM-10709 |
| | | 5 | Alathane | 5000 | | 82 | 95-PS-10801 | 95-PY-10809 |
| | | | Laminated | 6500 | 61-1/4 | 95-TL-10909 | | |
| | | Textile | 5200 | 61-1/4 | 95-TM-10909 | | | |
| 12 | 3-1/2 | Laminated | 5000 | 15-1/2 | 58-3/4 | 95-TL-12601 | 95-TL-12609 | |
| | | Malleable | 6000 | | 83-1/2 | 95-FM-12601 | 95-FM-12609 | |
| | | Alathane | 4800 | | 73-1/2 | 95-PY-12601 | 95-PY-12609 | |
| | | 4 | Textite | 6500 | | 67-1/2 | | 95-TM-12709 |
| | Alathane | | 4800 | | 76-1/4 | 95-PY-12701 | 95-PY-12709 | |
| | Moldon | | 1600 | | 70-1/4 | 95-MR-12709 | | |
| | | 5 | Alathane | 6000 | | 90 | 95-PY-12801 | 95-PY-12809 |

Hot Forged Series 95 TRL

- Capacities from 1000 to 17 000 pounds.
- Hot Plate 8.1/2" X 8.1/2"
- Bolt hole centers 7" X 7"; 5/8" Mounting bolt
- Top Plate and yoke base of drop forged steel. 7" dia. precision tapered roller bearing for load raceway. Optional ball bearing load race available at reduced.
- Dual wheel caster available in this series.



AO00064

| Stock Code | Size |
|------------|--------------|
| AO00064 | 6" x 3" |
| AO00065 | 6" x 5" |
| AO00066 | 8" x 4" |
| AO00067 | 8" x 6" |
| AO00068 | 10" x 4" |
| AO00069 | 10" x 5" |
| AO00070 | 12" x 3-1/2" |
| AO00071 | 12" x 4" |
| AO00072 | 12" x 5" |


450 Medium Duty Swivel Castor / 7R Rubber / CCA Cast Iron Swivel / PA Nylon

Medium Duty - Series 450 (Swivel Castor with mounting plate, formed steel sheet, zinc plated; Equipped with Double Ball Race.)

| Size | | Choice of Wheels & Stock Code | | Bearings | Load Cap (Kg) | Wheel Width | Axle Bore | Height | Dimension (m/m) | | Bolt Ø | Weight (gram) |
|-------------|-----|-------------------------------|---------|----------|---------------|-------------|-----------|--------|-----------------|--------------|--------|---------------|
| | | | | | | | | | Top Plate | Hole Spacing | | |
| 3"/80 | 7R | Continental Tyre | AO00073 | Roller | 50 | 25 | 12 | 104 | 105 x 85 | 80 x 60 | 8,2 | 675 |
| | CCA | Cast Iron | AO00087 | Plain | 60 | | | | | | | 860 |
| | PA | Polypropylene Nylon | AO00101 | Plain | 60 | | | | | | | 505 |
| 4"/100 | 7R | Continental Tyre | AO00074 | Roller | 70 | 30 | 12 | 124 | 105 x 85 | 80 x 60 | 8,2 | 970 |
| | CCA | Cast Iron | AO00088 | Plain | 100 | | | | | | | 1235 |
| | PA | Polypropylene Nylon | AO00102 | Plain | 100 | | | | | | | 540 |
| 5"/125 | 7R | Continental Tyre | AO00075 | Roller | 100 | 38 | 15 | 149 | 105 x 85 | 80 x 60 | 8,2 | 1200 |
| | CCA | Cast Iron | AO00089 | Plain | 150 | | | | | | | 1540 |
| | PA | Polypropylene Nylon | AO00103 | Plain | 150 | | | | | | | 765 |
| 6"/160 | 7R | Continental Tyre | AO00076 | Roller | 135 | 40 | 20 | 188 | 135 x 105 | 105X75-80 | 10,2 | 2610 |
| | CCA | Cast Iron | AO00090 | Plain | 225 | | | | | | | 3650 |
| | PA | Polypropylene Nylon | AO00104 | Plain | 225 | | | | | | | 1900 |
| 8"/200 | 7R | Continental Tyre | AO00077 | Roller | 205 | 50 | 20 | 231 | 135 x 105 | 105X75-80 | 10,2 | 3555 |
| | CCA | Cast Iron | AO00091 | Plain | 250 | | | | | | | 4830 |
| | PA | Polypropylene Nylon | AO00105 | Plain | 250 | | | | | | | 2200 |
| 10"/250 | 7R | Continental Tyre | AO00078 | Roller | 270 | 60 | 25 | 290 | 135 x 105 | 105X75-80 | 10,2 | 5130 |
| | CCA | Cast Iron | AO00092 | Plain | 300 | | | | | | | 6930 |
| | PA | Polypropylene Nylon | AO00106 | Plain | 300 | | | | | | | 3250 |
| 11 1/2"/280 | 7R | Continental Tyre | AO00079 | Roller | 385 | 70 | 25 | 320 | 165 x 205 | 120 x 160 | 14,2 | 8300 |
| | CCA | Cast Iron | AO00093 | Plain | 450 | | | | | | | 10900 |
| | PA | Polypropylene Nylon | AO00107 | Plain | - | | | | | | | - |



AO00073
Continental Series



AO00087
Cast Iron Series

450 Medium Duty Rigid Castor / 7R Rubber / CCA Cast Iron / PA Nylon

Medium Duty - Series 460 (Fixed Castor with mounting plate, formed steel sheet, zinc plated.)

| Size | | Choice of Wheels & Stock Code | | Bearings | Load Cap (Kg) | Wheel Width | Axle Bore | Height | Dimension (m/m) | | Bolt Ø | Weight (gram) |
|-------------|-----|-------------------------------|---------|----------|---------------|-------------|-----------|--------|-----------------|--------------|--------|---------------|
| | | | | | | | | | Top Plate | Hole Spacing | | |
| 3"/80 | 7R | Continental Tyre | AO00080 | Roller | 50 | 25 | 12 | 104 | 105 x 85 | 80 x 60 | 8,2 | 500 |
| | CCA | Cast Iron | AO00094 | Plain | 60 | | | | | | | 685 |
| | PA | Polypropylene Nylon | AO00108 | Plain | 60 | | | | | | | 330 |
| 4"/100 | 7R | Continental Tyre | AO00081 | Roller | 70 | 30 | 12 | 124 | 105 x 85 | 80 x 60 | 8,2 | 635 |
| | CCA | Cast Iron | AO00095 | Plain | 100 | | | | | | | 900 |
| | PA | Polypropylene Nylon | AO00109 | Plain | 100 | | | | | | | 565 |
| 5"/125 | 7R | Continental Tyre | AO00082 | Roller | 100 | 38 | 15 | 149 | 105 x 85 | 80 x 60 | 8,2 | 930 |
| | CCA | Cast Iron | AO00096 | Plain | 150 | | | | | | | 1270 |
| | PA | Polypropylene Nylon | AO00110 | Plain | 150 | | | | | | | 945 |
| 6"/160 | 7R | Continental Tyre | AO00083 | Roller | 135 | 40 | 20 | 188 | 135 x 105 | 105X75-80 | 10,2 | 1940 |
| | CCA | Cast Iron | AO00097 | Plain | 225 | | | | | | | 2890 |
| | PA | Polypropylene Nylon | AO00111 | Plain | 225 | | | | | | | 1170 |
| 8"/200 | 7R | Continental Tyre | AO00084 | Roller | 205 | 50 | 20 | 231 | 135 x 105 | 105X75-80 | 10,2 | 2825 |
| | CCA | Cast Iron | AO00098 | Plain | 250 | | | | | | | 4100 |
| | PA | Polypropylene Nylon | AO00112 | Plain | 250 | | | | | | | 1450 |
| 10"/250 | 7R | Continental Tyre | AO00085 | Roller | 270 | 60 | 25 | 290 | 135 x 105 | 105X75-80 | 10,2 | 4845 |
| | CCA | Cast Iron | AO00099 | Plain | 300 | | | | | | | 6645 |
| | PA | Polypropylene Nylon | AO00113 | Plain | 300 | | | | | | | 2670 |
| 11 1/2"/280 | 7R | Continental Tyre | AO00086 | Roller | 385 | 70 | 25 | 320 | 165 x 205 | 120 x 160 | 14,2 | 7000 |
| | CCA | Cast Iron | AO00100 | Plain | 450 | | | | | | | 9900 |
| | PA | Polypropylene Nylon | AO00114 | Plain | - | | | | | | | - |



AO00080
Continental Series



AO00094
Cast Iron Series

Trolley & Castor

PNK / PNAK Medium Duty Swivel Castor

Specifications

| Stock Code | Model | Wheel Size (mm) A | Load Capacity (kg) | | | Dimension (mm) | | | | | | | | Weight (gram) |
|--------------------|---------------------|-------------------|--------------------|------|--------|----------------|----------------|----|----|---------------------------------|---------------------------------|------|--|---------------|
| | | | Safety | Max. | Static | H | H ¹ | B | D | F ₁ x F ₂ | P ₁ x P ₂ | d | | |
| AO00202 AO00203 | PNK-75 PNAK-75 | 75 (3") | 140 | 210 | 280 | 63 | 101 | 40 | 10 | 95 x 72 | 63 x 40 | 9.5 | | 450 390 |
| AO00204 AO00205 | PNK-100 PNAK-100 | 100 (4") | 200 | 300 | 400 | 94 | 144 | 43 | 12 | 115 x 80 | 80 x 45 | 11.0 | | 780 710 |
| AO00206 AO00207 | PNK-130 PNAK-130 | 130 (5") | 290 | 435 | 580 | 112 | 177 | 53 | 20 | 137 x 93 | 100 x 50-56 | 11.0 | | 1250 1025 |
| AO00208 AO00209 | PNK-150 PNAK-150 | 150 (6") | 350 | 525 | 700 | 123 | 198 | 56 | 20 | 137 x 93 | 100 x 50-56 | 11.0 | | 1610 1410 |
| AO00210 AO00211 | PNK-200 PNAK-200 | 200 (8") | 440 | 660 | 880 | 150 | 250 | 56 | 20 | 151 x 102 | 112 x 630 | 11.5 | | 2650 2440 |

Model PNK
AO00202
(K) Rigid Bracket With (PN) Elastic (Polybutadiene) Rubber Wheels (Ball Bearing)

Model PNAK
AO00203
(K) Rigid Bracket With (PNA) Elastic (Polybutadiene) Rubber Wheel (Plain Bearing)



PNUJ / PNUAJ Medium Duty Swivel Castor Wheel

Specifications

| Stock Code | Model | Wheel Size (mm) A | Load Capacity (kg) | | | Dimension (mm) | | | | | | | | Weight (gram) |
|--------------------|-----------------------|-------------------|--------------------|------|--------|----------------|----------------|----|----|---------------------------------|---------------------------------|------|----|---------------|
| | | | Safety | Max. | Static | H | H ¹ | B | D | F ₁ x F ₂ | P ₁ x P ₂ | d | E | |
| AO00212 AO00213 | PNUJ-75 PNUAJ-75 | 75 (3") | 200 | 300 | 400 | 63 | 101 | 40 | 10 | 82 x 82 | 63 x 63 | 9.5 | 22 | 535 490 |
| AO00214 AO00215 | PNUJ-100 PNUAJ-100 | 100 (4") | 300 | 450 | 600 | 94 | 144 | 43 | 12 | 95 x 95 | 71 x 71 | 11.0 | 35 | 990 930 |
| AO00216 AO00217 | PNUJ-130 PNUAJ-130 | 130 (5") | 400 | 600 | 800 | 112 | 177 | 53 | 20 | 108 x 108 | 80 x 80 | 11.0 | 40 | 1720 1510 |
| AO00218 AO00219 | PNUJ-150 PNUAJ-150 | 150 (6") | 500 | 750 | 1000 | 123 | 198 | 56 | 20 | 120 x 120 | 90 x 90 | 11.0 | 45 | 2025 1830 |
| AO00220 AO00221 | PNUJ-200 PNUAJ-200 | 200 (8") | 700 | 1050 | 1400 | 150 | 250 | 56 | 20 | 140 x 140 | 112 x 112 | 11.5 | 58 | 3110 2910 |

Model PNUJ
AO00212
(J) Swivel Bracket
With (PNU) Urethane Rubber
Wheels (Ball Bearing)

Model PNUAJ
AO00213
(J) Swivel Bracket
With (PNUA) Urethane Rubber
Wheel (Plain Bearing)



PNUJB / PNUAJB Medium Duty Swivel Castor Wheel

Specifications

| Stock Code | Model | Wheel Size (mm) A | Load Capacity (kg) | | | Dimension (mm) | | | | | | | | Stopping torque (kg-cm) | Weight (gram) | |
|--------------------|-------------------------|-------------------|--------------------|------|--------|----------------|----------------|----|----|---------------------------------|---------------------------------|------|-----|-------------------------|---------------|---------------|
| | | | Safety | Max. | Static | H | H ¹ | B | D | F ₁ x F ₂ | P ₁ x P ₂ | d | K | | | E |
| AO00222 AO00223 | PNUJB-75 PNUAJB-75 | 75 (3") | 200 | 300 | 400 | 63 | 101 | 40 | 10 | 82 x 82 | 63 x 63 | 9.5 | 60 | 22 | 75 | 565 520 |
| AO00224 AO00225 | PNUJB-100 PNUAJB-100 | 100 (4") | 300 | 450 | 600 | 94 | 144 | 43 | 12 | 95 x 95 | 71 x 71 | 11.0 | 90 | 35 | 90 | 1210 1150 |
| AO00226 AO00227 | PNUJB-130 PNUAJB-130 | 130 (5") | 400 | 600 | 800 | 112 | 177 | 53 | 20 | 108 x 108 | 80 x 80 | 11.0 | 95 | 40 | 120 | 1900 1690 |
| AO00228 AO00229 | PNUJB-150 PNUAJB-150 | 150 (6") | 500 | 750 | 1000 | 123 | 198 | 56 | 20 | 120 x 120 | 90 x 90 | 11.0 | 100 | 45 | 160 | 2225 2030 |
| AO00230 AO00231 | PNUJB-200 PNUAJB-200 | 200 (8") | 700 | 1050 | 1400 | 150 | 250 | 56 | 20 | 140 x 140 | 112 x 112 | 11.5 | 105 | 58 | 210 | 3280 30802 |

Model PNUJB
AO00222
(JB) Swivel Brackets/Stopper
With (PNU) Urethane Rubber
Wheels (Ball Bearing)

Model PNUAJB
AO00223
(JB) Swivel Bracket/Stopper
With (PNUA) Urethane Rubber
Wheel (Plain Bearing)



PNUK / PNUAK Medium Heavy Duty Swivel Castor Wheel

Specifications

| Stock Code | Model | Wheel Size (mm) A | Load Capacity (kg) | | | Dimension (mm) | | | | | | | | Weight (gram) | |
|--------------------|-----------------------|-------------------|--------------------|------|--------|----------------|----------------|----|----|---------------------------------|---------------------------------|------|-----|---------------|--------------|
| | | | Safety | Max. | Static | H | H ¹ | B | D | F ₁ x F ₂ | P ₁ x P ₂ | d | K | | E |
| AO00232 AO00233 | PNUK-75 PNUAK-75 | 75 (3") | 200 | 300 | 400 | 63 | 101 | 40 | 10 | 95 x 72 | 63 x 40 | 9.5 | 60 | 22 | 425 380 |
| AO00234 AO00235 | PNUK-100 PNUAK-100 | 100 (4") | 300 | 450 | 600 | 94 | 144 | 43 | 12 | 115 x 80 | 80 x 45 | 11.0 | 90 | 35 | 750 690 |
| AO00236 AO00237 | PNUK-130 PNUAK-130 | 130 (5") | 400 | 600 | 800 | 112 | 177 | 53 | 20 | 137 x 93 | 100 x 50-56 | 11.0 | 95 | 40 | 1180 970 |
| AO00238 AO00239 | PNUK-150 PNUAK-150 | 150 (6") | 500 | 750 | 1000 | 123 | 198 | 56 | 20 | 137 x 93 | 100 x 50-56 | 11.0 | 100 | 45 | 1555 1360 |
| AO00240 AO00241 | PNUK-200 PNUAK-200 | 200 (8") | 700 | 1050 | 1440 | 150 | 250 | 56 | 20 | 151 x 102 | 112 x 63 | 11.5 | 105 | 58 | 2460 2260 |

Model PNUK
AO00232
(K) Rigid Bracket
With (PNU) Urethane Rubber
Wheel (Ball Bearing)

Model PNUAK
AO00233
(K) Rigid Bracket
With (PNUA) Urethane Rubber
Wheel (Plain Bearing)



RGJM / RGJMB Heavy Duty Castor

Specifications

| Stock Code | Model | Wheel Size (mm) A | Load Capacity (kg) | | | Dimension (mm) | | | | | | | | Weight (gram) |
|------------|-----------|-------------------|--------------------|----------------|---------------------------------|---------------------------------|----------------|---------------------------------|---------------------------------|------|----|----|----|---------------|
| | | | Safety | Max. | Static | H | H ¹ | F ₁ x F ₂ | P ₁ x P ₂ | d | D | B | E | |
| AO00242 | RGJM-100 | 100 (4") | 400 | 600 | 800 | 94 | 144 | 108 x 108 | 80 x 80 | 11.0 | 12 | 57 | 37 | 1880 |
| AO00243 | RGJM-130 | 130 (5") | 480 | 720 | 960 | 112 | 177 | 108 x 108 | 80 x 80 | 11.0 | 20 | 60 | 40 | 2650 |
| AO00244 | RGJM-150 | 150 (6") | 600 | 900 | 1200 | 123 | 198 | 120 x 120 | 90 x 90 | 11.0 | 20 | 60 | 45 | 3100 |
| AO00245 | RGJM-200 | 200 (8") | 820 | 1230 | 1640 | 150 | 250 | 140 x 140 | 112 x 112 | 14.0 | 25 | 71 | 58 | 6750 |
| Stock Code | Model | Wheel Size (mm) A | Load Capacity (kg) | | | Dimension (mm) | | | | | | | | Weight (gram) |
| Safety | Max. | Static | H | H ¹ | F ₁ x F ₂ | P ₁ x P ₂ | d | D | B | E | | | | |
| AO00246 | RGJMB-100 | 100 (4") | 400 | 600 | 800 | 94 | 144 | 108 x 108 | 80 x 80 | 11.0 | 12 | 57 | 37 | 2220 |
| AO00247 | RGJMB-130 | 130 (5") | 480 | 720 | 960 | 112 | 177 | 108 x 108 | 80 x 80 | 11.0 | 20 | 60 | 40 | 3010 |
| AO00248 | RGJMB-150 | 150 (6") | 600 | 900 | 1200 | 123 | 198 | 120 x 120 | 90 x 90 | 11.0 | 20 | 60 | 45 | 3820 |
| AO00249 | RGJMB-200 | 200 (8") | 820 | 1230 | 1640 | 150 | 250 | 140 x 140 | 112 x 112 | 14.0 | 25 | 71 | 58 | 7640 |

14077
Aluminium Die Cast

Model RGJM
AO00242
(JM) Heavy Duty Swivel Bracket
With (RG) Elastic (Polybutadiene)
Rubber Wheel - Ball Bearing

Model RGJMB
AO00246
(JMB) Heavy Duty Swivel Bracket
With Stopper (Brake)
With (RG) Elastic (Polybutadiene)
Rubber Wheel-Ball Bearing



RGKH Heavy Duty Rigid Castor

Specifications

| Stock Code | Model | Wheel Size (mm) A | Load Capacity (kg) | | | Dimension (mm) | | | | | | Weight (gram) | |
|------------|----------|-------------------|--------------------|------|--------|----------------|----------------|---------------------------------|---------------------------------|------|----|---------------|------|
| | | | Safety | Max. | Static | H | H ¹ | F ₁ x F ₂ | P ₁ x P ₂ | d | D | | B |
| AO00250 | RGKH-100 | 100 (4") | 400 | 600 | 800 | 94 | 144 | 139 x 88 | 103 x 52 | 11.0 | 12 | 57 | 1540 |
| AO00251 | RGKH-130 | 130 (5") | 480 | 720 | 960 | 112 | 177 | 140 x 96 | 100 x 56 | 11.0 | 20 | 60 | 2460 |
| AO00252 | RGKH-150 | 150 (6") | 600 | 900 | 1200 | 123 | 198 | 140 x 96 | 100 x 56 | 11.0 | 20 | 60 | 2750 |
| AO00253 | RGKH-200 | 200 (8") | 820 | 1230 | 1640 | 150 | 250 | 151 x 102 | 112 x 63 | 14.0 | 25 | 71 | 5400 |

Model RGKH
AO00250
(KH) Heavy Duty Rigid Bracket
With (RG) Elastic
(Polybutadiene) Rubber Wheel-Ball Bearing



