


COMET Pipecutter

Specifications

Pipe Diameter	Pipe Wall Thickness	Weight	Graduated Scale for Beveling	Operating Temperature
108-600mm	Up to 50mm	10.5kg	45°	-20°C to 40°C

Accurate square and bevel edge circumferential flame cutting. Designed for simple operation with optimum stability and a smooth dependable drive, the COMET Pipecutter is fully adjustable to any cutting length. The control valves are located away from the heat and changeover is quick between different diameters.

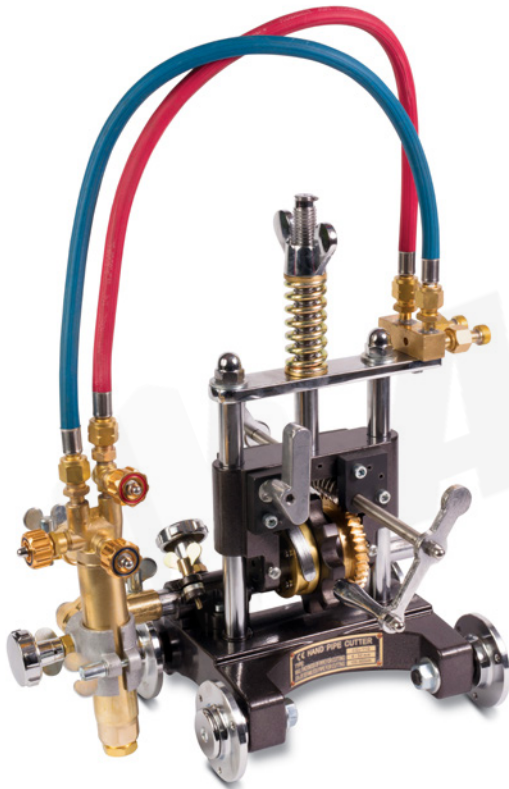

Features

- Torch designed to suit Cigweld type ANME/PNME cutting nozzles
- Comes complete with 2.4 metres of hose

Ordering Information

Part No.	Description
338603	COMET Pipecutter
Parts & Accessories	
Part No. Description	
3-seat Cutting Nozzles, standard speed Acetylene	
To be provided	Tip Size 00, plate thickness
To be provided	Tip Size 0, plate thickness
To be provided	Tip Size 1, plate thickness
To be provided	Tip Size 2, plate thickness
To be provided	Tip Size 3, plate thickness
To be provided	Tip Size 4, plate thickness
3-seat Cutting Nozzles, standard speed LPG	
To be provided	Tip Size 0, plate thickness
To be provided	Tip Size 1, plate thickness
To be provided	Tip Size 2, plate thickness
To be provided	Tip Size 3, plate thickness
To be provided	Tip Size 4, plate thickness
To be provided	Additional 2m chain
To be provided	Nozzle nut

Packaged Items

- Torch
- Cutting Nozzle
- 2.4M Chain
- Large Wheel
- Tip Cleaners
- Spanners
- Operating Manual
- Gas Torch Holder

Distributed By:



**Main Office: 331 Jalan Besar Singapore 208983
Tel: 6296 0679**

**Branch Office: 21 Tuas Basin Link Singapore 638782
Tel: 6265 1888**