


# COMET Platecutter

## Specifications

| Weight | Wheel Width | Motor Model         | Power Source  | Revolution        | Cutting Speed      | Cutting Thickness | Cutting Edge Shape | Operating Temperature |
|--------|-------------|---------------------|---------------|-------------------|--------------------|-------------------|--------------------|-----------------------|
| 9.5kg  | 160mm       | Condenser induction | 240V, 50/60Hz | 1500rpm (no load) | 150-1500mm per min | 1-160mm           | Square cutting     | -20°C to 40°C         |

Automatically cuts straight lines, circles and bevels. Lightweight and portable, the COMET Platecutter is a compact unit designed for simple operation with high stability for long-distance cutting.

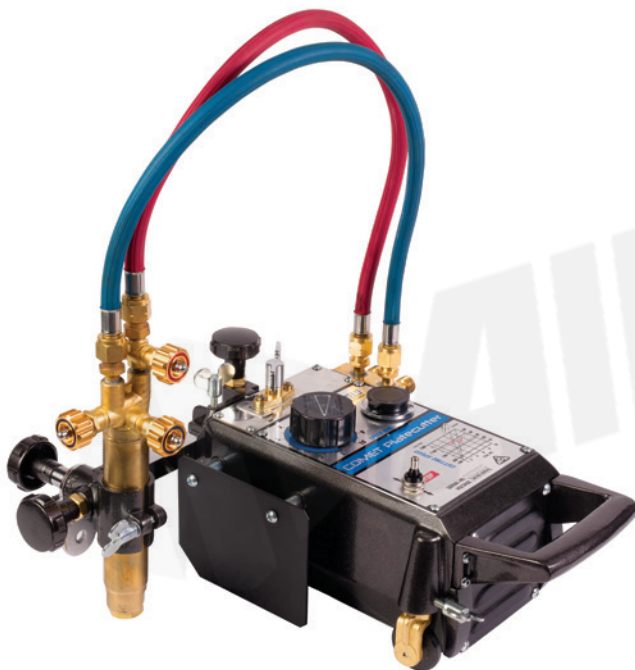

## Features

- Torch designed to suit CIGWELD Type ANME/PNME Cutting Nozzles
- Cutting speed up to 1500mm/minute (ideal for Cutmaster SL100 Automated Plasma Torch)
- 3 simple functions:
  - ON / OFF
  - Direction
  - Speed
- Comes complete with 3.6 metres of hose
- Ergonomic handle
- Various optional accessories, including:
  - Torch Holder for Cutmaster SL100 Automated Plasma Torch (#338550)
- Acetylene and LPG available

## Ordering Information

| Part No.   | Description                  |
|--|------------------------------|
| 338602   | COMET Platecutter            |
| Parts & Accessories                              |                              |
| Part No.   | Description                  |
| 3-seat Cutting Nozzles, standard speed Acetylene |                              |
| To be provided                                   | Tip Size 00, plate thickness |
| To be provided                                   | Tip Size 0, plate thickness  |
| To be provided                                   | Tip Size 1, plate thickness  |
| To be provided                                   | Tip Size 2, plate thickness  |
| To be provided                                   | Tip Size 3, plate thickness  |
| To be provided                                   | Tip Size 4, plate thickness  |
| 3-seat Cutting Nozzles, standard speed LPG       |                              |
| To be provided                                   | Tip Size 0, plate thickness  |
| To be provided                                   | Tip Size 1, plate thickness  |
| To be provided                                   | Tip Size 2, plate thickness  |
| To be provided                                   | Tip Size 3, plate thickness  |
| To be provided                                   | Tip Size 4, plate thickness  |
| To be provided                                   | Rail, 1.8m long              |
| To be provided                                   | Nozzle nut                   |

## Packaged Items

- Torch
- Cutting Nozzle
- 1.8 m Rail
- Power Cable
- Tip Cleaner
- Spanner
- Allen Key
- Operating Manual
- Rack
- Rigging (able to hold VT plasma cutting torch- OTD7/5215&OTD7/7501)
- Gas Torch Holder

Distributed By:  **Allinton**

Main Office: 331 Jalan Besar Singapore 208983  
Tel: 6296 0679

Branch Office: 21 Tuas Basin Link Singapore 638782  
Tel: 6265 1888