



HOBBY COLD WATER HIGH PRESSURE CLEANER

- Three Axial-piston wobble plate pump
- Tempered Stainless Steel Plungers
- Automatic safety valve with pressure shut-off at pump head
- Power Supply Cord Length 5m
- TSS, Remote Control for total shut-down of high pressure cleaner
- Water Filter
- Foam lance w/ bottle kit (0.5L)
- H.P. Soft type soft gun and lance
- Adjustable fan/pencil jet spray head

HOBBY
HOBBY COLD WATER HIGH PRESSURE CLEANER 100BAR 230V

Stock Code	Model No.	Bar	PSI	L/H	GPM	kW	RPM	Volt
AA00191	HOBBY	110	1600	370	0.98	1.4	2400	230

PIPULP WET & DRY VACUUM CLEANER

- Clean solid particulate and liquid easily
- Multi filtration system
- Special air-blowing function feature applies to 20L cleaner only
- Durable stainless steel tank
- Quick liquid drainage
- Comfortable handrail
- Flexible tank turnover to clean tank
- Big & strong rotary wheels

Stock Code	AA00008-1	Noise	76 db(A)
Model No.	VC20	Cable Length	4.5 m
Capacity	20 L	Hose Length	1.5m standard
Voltage	230V	Suction	17 Kpa
Power	1*Silent Two Stage 1200W	Packing Size	42.6 x 37 x 59.5 cm
Certificates	CE, GS, EMC, RoHS, CB, UKCA		
Standard Accessories	D32*1.5m Hose Assembly, Wet Dry Floor Nozzle, Crevice Nozzle, Round Brush, Cartridge Filter, Plastic Tubes		



VC20
1200W 20L 230V WET & DRY VACUUM CLEANER

Stock Code	AA00009-1	Noise	76 db(A)
Model No.	VC40	Cable Length	4.5 m
Capacity	40 L	Hose Length	1.5m standard
Voltage	230V	Suction	17 Kpa
Power	1*Silent Two Stage 1200W	Packing Size	46 x 46 x 71 cm
Certificates	CE, GS, EMC, RoHS, CB, UKCA		
Standard Accessories	D32*1.5m Hose Assembly, Wet Dry Floor Nozzle, Round Brush, Crevice Nozzle, Plastic Tubes, Cloth Filter, Water Sponge		



VC40
1200W 40L 230V WET & DRY VACUUM CLEANER


Stock Code	AA00010-1	Noise	76 db(A)
Model No.	VC80	Cable Length	4.5 m
Capacity	80 L	Hose Length	1.5m Standard
Voltage	230V	Suction	19 Kpa
Power	3*Silent Two Stage 3000W	Packing Size	58.5 x 57.3 x 99 cm
Certificates	CE, GS, EMC, RoHS, CB, UKCA		
Standard Accessories	D38*1.5m Hose Assembly, Wet Floor Nozzle, Dry Floor Nozzle, Round Brush, Crevice Nozzle, Cloth Filter Assembly, Support Basket, Metal Tubes		



VC80
3000W 80L 230V WET & DRY VACUUM CLEANER

CLOSET AUGER

- High quality tools in 3' (1 m) length provide fast and safe clearing of toilet obstructions
- Vinyl guard protects porcelain
- New durable, kink-resistant, 1/2" (12.7 mm) compression-wrapped Inner Core Cable
- Large, ergonomically designed handles
- Negotiate water-conserving toilets



K-3
CLOSET AUGER

Stock Code	Model No.	Description	Weight	Replac. Cables
AH59787	K-3	3' (1 m) Toilet Auger with Bulb Head	1.9kg	-



FLAT SEWER TAPE

- Sizes and lengths for use on sewer and drain lines through 8" (200 mm) in diameter and up to 100' (30,4 m) in length
- Carrier included with all except 25' (7,6 m) model
- All models have a hand grip and a spear point at one end and roller ball at the other

Stock Code	Model No.	Width	Thickness	Length	Capacity	Weight
AH62535	E-2725	12mm	2mm	15.2m	20 - 40 mm	2.7kg
AH62555	E-2729	20mm	2mm	15.2m	50 - 110 mm	3.6kg
AH62595	E-2737	20mm	3mm	15.2m	110 - 150 mm	7.3kg

SINK MACHINE

3/4" to 2 1/2" (20 mm to 75 mm) Drain Lines



- The model K-40 Sink Machine is ideal for cleaning small secondary drain lines
- 1/4" (6 mm) cables best for 3/4" to 1 1/2" (20 mm to 40 mm) lines
- 5/16" (8 mm) cables best for 3/4" to 1 1/2" (20 mm to 40 mm) lines
- 3/8" (10 mm) cables best for 1 1/4" to 2 1/2" (40 mm to 75 mm) lines
- The K-40 sits flat on the floor or countertop and also tips onto its back for easy access to sink drains and bathtubs full of water.
- It practically eliminates job site cleanup thanks to the patented guide hose two-way AUTOFEED® control.
- It completely contains the rotating cable and eliminates any waste water splashing or spraying
- 1/2 HP induction motor quietly delivers enough torque to clear even the toughest blockages
- Premium-quality, compression-wound inner core cable combines strength and flexibility to resist kinking
- Two-piece 'twist lock' drum housing will not dent or corrode and allows easy access to the inner drum and cable
- Special inner drum design reduces cable flip-over inside the drum and drum leakage
- Two-way AUTOFEED control advances and retrieves the drain cleaning cable with a simple push of a lever keeping you and the work area clean
- Includes RIDGID® drain cleaning gloves and operator's manual



K-40.AF
SINK MACHINE

Stock Code	Model No.	Description	Voltage	Weight
AH71732	K-40.AF	Machine with: AUTOFEED, Guide Hose, Mounting Bracket, C-13IC SB, 5/16" x 35' (8 mm x 10.7 m) Speed Bump Cable with Inner Drum	230V	15kg

DRAIN CLEANER

3/4" to 4" (20 mm to 110 mm) Drain Lines

- Compact, versatile professional's machine. Capable of running three different size cables: 5/16" (8 mm), 3/8" (10 mm) and 5/8" (16 mm). The perfect, all-around sink, shower and floor drain machine. Weighs less than 40 lbs (18 kg)
- Uses sections of 5/8" (16 mm) cable, cleans 1 1/4" to 4" (32 mm to 110 mm) lines up to 100 feet
- C-8 best for 1 1/4" to 3" (32 mm to 75 mm) drains
- C-9 best for 2" to 4" (50 mm to 110 mm) drains
- Equipped with an A-17 drum adapter for runs up to 50' (15 m) of 5/16" (8 mm) cable or, 35' (11 m) of 3/8" (10 mm) continuous length cable
- 5/16" (8 mm) best for 3/4" (20 mm) to 1 1/2" (40 mm) lines
- 3/8" (10 mm) best for 1 1/4" (32 mm) to 2" (50 mm) lines
- Unique, easy-to-use, instant-acting cable clutch maximizes operator control
- Equipped with 1/6 HP motor that spins cable at 400 RPM
- Includes A-1 RIDGID® drain cleaning mitt and operator's manual



K-50
DRAIN CLEANER



Stock Code	Model No.	Description	Voltage (V)	Weight (kg)
AH76455	K50	Machine Only	230	16.8
AH76485	K-50-6	with -17-A Adapter, A-30 Cable Kit	230	30.4
AH76495	K-50-8	with A-17-A Adapter, A-17-B Adapter, A-30 Cable Kit	230	34.9
AH58980	K-50-6	with -17-A Adapter, A-30 Cable Kit	115	30.4
AH59000	K-50-8	with A-17-A Adapter, A-17-B Adapter, A-30 Cable Kit	115	34.9

K-1500 DRAIN CLEANER

2" to 8" (50 mm to 200 mm) Drain and Sewer Lines



- The finest all-around sewer and drain cleaning machine. One man can easily clean the heaviest blockages – indoors or out. High-speed cleaning gets the job done faster and better
- Wheels to the job site – sets up fast, cleans up fast
- Low-profile "B" frame design will fit most crawl spaces. Loads and unloads from truck easily. Upright "A" frame features cable carrier storage during transport, ideal for in-house applications
- Equipped to run, easy to handle, 15' (4.6 m) sections of 1 1/4" (32 mm) cable to clean 3" to 8" (32 mm to 200 mm) lines to 200' (61 m)
- Easy clutch jaw change-out adapts K-1500 to run 15' (4.6) sections of 7/8" (22 mm) cable through 2" to 4" (50 to 100 mm) lines up to 175' (53 m)
- Equipped with 3/4 HP motor that spins cable at 710 RPM



Stock Code	Model No.	Description	Voltage (V)	Weight (kg)
AH23692		Machine with A-1 Mitt, A-12 Pin Key, and Rear Guide Hose	115	61.3
AH23702		Machine with A-1 Mitt, A-12 Pin Key, and A-34-12 Rear Guide Hose, Plus: Seven Sections 1 1/4" (32 mm) (C-14) Cable, Total 105 Feet, Two A-8 Cable Carriers, Nine-Piece 1 1/4" Tool Set	115	116.1
AH23712	K-1500A	Machine with A-1 Mitt, A-12 Pin Key, and A-34-12 Rear Guide Hose, Plus: Seven Sections 1 1/4" (32 mm) (C-11) Cable, Total 105 Feet, Two A-8 Cable Carriers, Nine-Piece 1 1/4" Tool Set	115	116.1
AH27592		Machine with A-1 Mitt, A-12 Pin Key, and A-34-12 Rear Guide Hose, Plus: Seven Sections 1 1/4" (32 mm) (C-11) Cable, Total 105 Feet, Two A-8 Cable Carriers, Nine-Piece 1 1/4" Tool Set	230	116.1
AH27612		Machine with A-1 Mitt, A-12 Pin Key, and Rear Guide Hose	230	61.3


DRAIN CLEANER

3/4" to 4" (20 mm to 110 mm) Drain Lines

- A powerful, easy to transport, versatile machine for cleaning indoor drains. Requires minimal set-up to clean sink lines, floor drains and roof vents
- Rugged, corrosion-resistant molded cable drum won't dent or rust. The drum tilt adjusts for proper cable feed angle. Inner-drum guards against cable flip-over inside the drum
- Cable drum quick-release and built-in hand-holds allow easy cable change and transport
- Maximum drum capacity is 100' (30,5 m) of 3/8" (10 mm) or 90' (27 m) of 1/2" (12 mm) continuous length cable
- 3/8" (10 mm) cable best for 1 1/2" to 3" (40 mm to 75 mm) lines up to 100' (30,5 m)
- 1/2" (12 mm) cable best for 2" to 4" (50 mm to 110 mm) lines up to 90' (27 m)
- Optional sink drum holds up to 50' (15 m) of 3/16" (8 mm) or 1/4" (6 mm) cable
- Ideal for cleaning through 3/4" to 1 1/2" (20 mm to 40 mm) sink traps
- Powerful 1/10 HP universal motor spins cable at 240 RPM. When cable hits blockage, motor gears down automatically to deliver more power and enhance operator control
- Tools connect to cable in seconds
- Optional heavy duty AUTOFEED® system
- Includes RIDGID® leather drain cleaning gloves and operator's manual



K-3800
DRAIN CLEANER

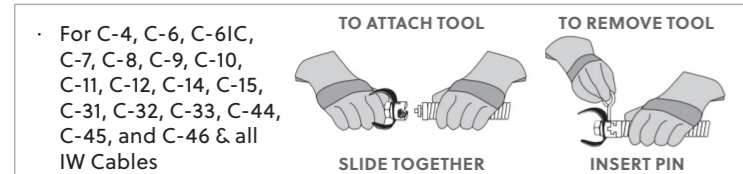

- For C-4, C-6, C-61C, C-7, C-8, C-9, C-10, C-11, C-12, C-14, C-15, C-31, C-32, C-33, C-44, C-45, and C-46 & all IW Cables

Stock Code	Model No.	Description	Voltage (V)	Weight (kg)
AH53107	K-3800	Machine with Gloves	115	19
AH53112	K-3800 with C-31	Machine with Std. Equip: C-31, 3/8" x 50' (10 mm x 15.2 m) Cable, T-202 Bulb Auger, T-205 "C" Cutter, T-211 Spade Cutter, A-13 Pin Key, Pair of Gloves	115	29.2
AH53117	K-3800 with C-32	Machine with Std. Equip: C-32, 3/8" x 75' (10 mm x 22.8 m) Cable, T-202 Bulb Auger, T-205 "C" Cutter, T-211 Spade Cutter, A-13 Pin Key, Pair of Gloves	115	32.2
AH53122	K-3800 with C-45	Machine with Std. Equip: C-45, 1/2" x 75' (12 mm x 22.8 m) Cable, T-102 Funnel Auger, T-142 Knife Blade Cutter, T-107 Spade Cutter, A-12 Pin Key, Pair of Gloves	115	37.7
AH53127	K-3800 with C-46	Machine with Std. Equip: C-46, 1/2" x 90' (12 mm x 27.4 m) Cable, T-102 Funnel Auger, T-142 Knife Blade Cutter, T-107 Spade Cutter, A-12 Pin Key, Pair of Gloves	115	41.3
AH59462	K-3800	Machine with Gloves	230	19
AH63822	K-3800 with C-45	Machine with Std. Equip: C-45, 1/2" x 75' (12 mm x 22.8 m) Cable, T-102 Funnel Auger, T-142 Knife Blade Cutter, T-107 Spade Cutter, A-12 Pin Key, Pair of Gloves	230	37.7
AH63827	K-3800 with C-32	Machine with Std. Equip: C-32, 3/8" x 75' (10 mm x 22.8 m) Cable, T-202 Bulb Auger, T-205 "C" Cutter, T-211 Spade Cutter, A-13 Pin Key, Pair of Gloves	230	32.2

STANDARD EQUIPMENT

Stock Code	Description (IC Cable)	AH53107 K-3800	AH53112 K-3800 w/C-31	AH53117 K-3800 w/C-32	AH53122 K-3800 w/C-45	AH53127 K-3800 w/C-46	AH59462 K-3800	AH63822 K-3800 w/C-45	AH63827 K-3800 w/C-32
AH37842	3/8" (10 mm) x 50' (15m)	▲	▲						
AH37862	1/2" (12 mm) x 75' (23 m)			▲				▲	
AH55467	1/2" (12 mm) x 90' (28m)				▲				
AH37847	3/8" (10 mm) x 75' (23 m)								▲

1 1/4" to 4" (32-100 mm) Drain Lines



K-60
DRAIN CLEANER

- Simple adjustment knob allows unit to spin both 7/8" (22mm) and 5/8" (16mm) diameter cable. Adjusts in seconds
- 7/8" (22mm) cable (C-10) cleans 2" to 4" (50 mm to 100mm) lines through 150' (45.7m)
- 5/8" (16mm) cable (C-7, C-8, C-9) cleans 1 1/4" to 4" (32mm to 100mm) lines through 125' (38.1m)
- A compact machine for institutional, commercial or residential cleaning. Also ideal for septic tank vacuum truck operators. Small enough to fit into cramped spaces, yet powerful enough to clear tough blockages
- Ideal for rooftop vent stacks. Rear handle allows for easy transporting up ladders and onto rooftops
- Remove only two bolts to access jaw set for cleaning or replacement. Removal of same bolts provides access to belt drive
- Equipped with 1/2 HP motor that spins cable at 600 RPM



Stock Code	Model No.	Description	Voltage (V)	Weight (kg)
AH66512	K-60SP	Machine with A-1 Operator's Mitt, A-12 Pin Key, and A-60-12 Rear Guide Hose	230	18.6
AH66517	K-60SP-SE	Machine with A-1 Operator's Mitt, A-12 Pin Key, and A-60-12 Rear Guide Hose, plus: A-61 Tool Kit and A-62 Cable Kit	230	41.7

1 1/2" to 4" (30 mm to 110 mm) Drain Lines

- The Model K-400 offers several unique, user-friendly features to make the toughest drain cleaning jobs easier and hassle-free. Designed with a sleek profile, the Model K-400 is a great fit for drain cleaners, service plumbers, facility and institutional maintenance departments and property management companies.
- 3/8" (10 mm) cable best for 1 1/2" to 3" (40 mm to 75 mm) lines
- 1/2" (12 mm) cable best for 3" to 4" (50 mm to 110 mm) lines
- Integrated Transport Cart – easy movement to and from the job site. Heavy-duty, large wheels easily navigate over bumps and up stairs
- Cable Control System – causes the drum to stop spinning when the blade becomes lodged in a blockage, limits potential for cable to flip-over in the drum and helps indicate to operator when blockages are encountered
- Retractable Handle – high-handle height during transport
- "Solid Core" Cable – uses tough 3/8" (10 mm) or 1/2" (12 mm) Integral Wound (IW) solid core cable that is rugged and kink resistant
- AUTOFEED® Control – offered as an accessory, this patented, automatic cable feed powers cable in and out of the drain. Reverse the direction of the AUTOFEED and the cable feeds back into the drum
- Drum Capacity – 100' (30,5 m) of 3/8" (10 mm) diameter cable or 75' (22,5 m) of 1/2" (12 mm) diameter cable
- Motor – 1/3 HP, motor spins cable at 165 RPM
- Weight (Machine Only) – 45 lbs (20.4 kg)
- Dimensions – Length 21" (53 cm) 24" (61 cm) with AUTOFEED, Height 23" (58,5 cm) Width 17" (43.2 cm)
- All Model K-400 machines are supplied with RIDGID® drain cleaning gloves and operator's manual



K-400
DRAIN CLEANER

Stock Code	Model No.	Description	Voltage (V)	Weight (kg)
AH27033	K-400 with C-45 IW	K-400 Machine with RIDGID Drain Cleaning Gloves – C-45 IW 12" x 75' (12 mm x 23 m) Solid Core (Integral Wound) Cable – T-260 Tool Set	230	37.0
AH27038		K-400 230V, 3/8 X 75 EXP	230	-

ELECTRIC WATER JETTER

1/4" to 4" (32 to 100mm) Drain Lines



KJ-1750
ELECTRIC WATER JETTER
115V/60HZ

- This jetter propels a highly flexible hose through 1/4" to 4" (32 to 100mm) lines—blasting through sludge, soap and grease blockages. As you pull the hose back, it power scrubs the line, flushing debris away and restoring drain lines to their free-flowing capacity
- Powerful:**
Actual working pressure of 1750 psi and flow of 1.4 GPM (5.3 l/min) for fast, effective cleaning of lines
- Pulse Action:**
Two levels of pulse are standard. Activate the KJ-1750's pulse action to easily negotiate difficult bends and traps
- Portable:**
The optional H-30 Cart rolls the jetter and hose to the job site. The jetter is easily removed from the cart in seconds for hard to reach drain or for remote storage. Optional adapter allows the KJ-1750 to be mounted on the compact H-10 Cart
- Electrical Requirement:**
The 2.0 HP motor draws a maximum of 17 Amps which requires a 20Amp, 115V circuit
- Easy to Use:**
Thrust propels the hose down the line. You simply guide the hose into the drain
- High Quality:**
Duplex pump with corrosion-resistant, forged brass head. New pressure control valve allows quick and easy pressure adjustment
- Dependable:**
Reduced number of fittings, hoses and parts minimizes leaks and down time keeping you on the job
- Versatile:**
Optional power washer package cleans cables, tools and other heavily soiled equipment

Stock Code	Model No.	Description	Weight
AH62687	KJ-1750	KJ-1750 Jetter with Dual Pulse: H-41, H-42, and H-44 1/4" NPT Nozzles, H-51 and H-52 1/4" NPT Nozzles, 50' x 1/2" (15.2 m x 3.2 mm) Sink Trap Hose, Nylon Storage Bag, Nozzle Cleaning Tool	34kg
AH62697	KJ-1750-C	Above With: H-30 Cart, 110' x 1/2" (33.5 m x 6.4 mm) Jet Hose	70.3kg

HYDRAULIC PRESSURE TEST PUMP



T-50K-P
TEST PUMP T-50K-P
50KG



T-300N
TEST PUMP T-300N
300KG



T-100N
TEST PUMP T-100K
100KG

- Achievement of high pressures 50, 100, 300, 500, 1000 kg/cm² by simple mechanism and simple operation
- Easy-to-carry handy type
- Lightweight and rust-free plastic tank, with dust-proof cover
- With direct-coupled type ball tap available for city water supply, easy to feed water
- Pressure gauge with 100Ø large vibration absorber
- The closing valve is of special construction of Kyowa original design
- T-50N is designed for large suction/discharge rate and lightweight, having the capacity several times the conventional model
- T-50N is simply connected with a 1.5m high pressure hose with one-touch coupler


Application:

- For hydrostatic test of high pressure vessels, pipelines and equipment.

Testing Procedures:

- Install the stop valves to the test pipe (#1, #2)
- Fill up the test pipe with water by the use of service water or other supply source
- When the test pipe is filled with water, remove air and close the valve (#2)
- Connect the tester and the test pipe with the attached pressure resistant hose ass'y
- Fill the water tank of the tester with water and operate the pump
- Open the ball valves No.21 and No.30 of

- the tester body and the stop valve (#1) of the test pipe and continue the operation to fill up with water
- When the pressure gauge No.23 equipped to the tester rises to the required pressure, close only the ball valve No.21 of the tester body
- If the pressure does not drop, the test pipe is perfect
- If the pressure drops, it is indicative of leakage caused somewhere on the test pipe
- Stop valves #1 and #2 are not included in accessories

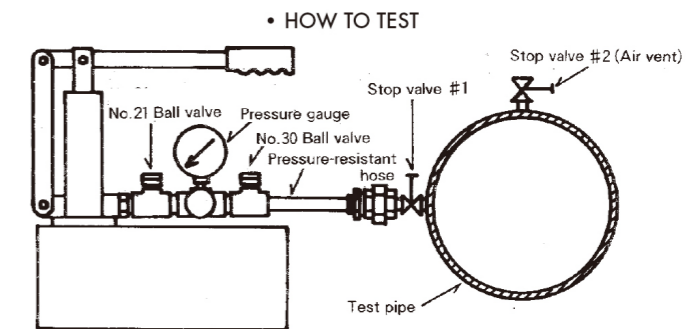

Stock Code	Model No.	Max. Pressure (Kg/cm)	Plunger Diameter (mm)	Stroke (mm)	Suction Per Stroke (c.c)	Tank Capacity (L)	Size of Discharge Nozzle	Dimensions L x W x H (mm)	Weight (kg)	Accessories
AA00021	T-50K-P	50	22	35	13	4.5 Plastic Tank	1/4	320 x 300 x 200	3.3	<ul style="list-style-type: none"> Pressure gauge 1/4 PT Pressure Hose Union Joint 1/2" Bushing 1/2" x 1/4"
AA00022	T-100K	100	22	35	13	5.2 Steel Tank	1/4	370 x 300 x 210	7	<ul style="list-style-type: none"> Pressure gauge 1/4 PT Ultra high pressure hose 1/4 PF x 1 M 1/4 Nipple
AA00023	T-300N	300	12	45	5	18	3/8	610 x 375 x 290	8	Hose ass'y: 3/8 x 1m
AA00024	T-500N	500	8	30	1.5	18	3/8	630 x 410 x 270	9.5	Hose ass'y: 3/8 x 1m
AA00025	T-1000N	1000	8	30	1.5	18	3/8	630 x 410 x 270	9.5	Hose ass'y: 3/8 x 1m

*Specifications may be subject to change without notice
*KYOWA's products are patented, pay careful attention to imitations

SUPER HIGH PRESSURE CLEANER TEST PUMP

- Oil-less construction (no lubrication oil grease required) need no maintenance
- High-pressure output comes from efficiency-oriented "no nonsense" design
- Differential operation (one suction and two dischargers per cycle) keeps the discharge fluctuations very low
- Close-coupled construction eliminates problems normally associated with the motor drive, such as belt slipping
- Design that fully utilizes rolling frictions (utility model and design registration being applied for) keeps the starting torque to minimum and provides maximum output
- Simple and rugged construction permits easy disassembly, cleaning, and re-assembly
- Compact and super-lightweight structure makes it handy and portable
- Newly developed universal nozzle permits almost every washing job with ease



KYC-20A
TEST PUMP

Applications:

- Air conditioner cleaning
- Car engine compartment cleaning
- Washing and finishing in plasterers work
- Food processing equipment cleaning
- Farm tool and machine cleaning
- Insecting machine cleaning
- Steel pipe cleaning

Come in a box with standard accessories:

- Suction Hose 1/2"
- Overflow Hose 90
- Strainer 3/4"
- High Pressure Hose 1/4" x 10m
- Universal Nozzle



KYC-40A
TEST PUMP

Come in a box with standard accessories:

- Suction Hose 1/2"
- Overflow Hose 90
- Strainer 3/4"
- Hose 1/4" x 1.1m
- Pressure Gauge Assembly
- Pressure Gauge

Stock Code	Model No.	Pressure (Mpa)	Rated Voltage	Output (KW)	Starting Method	Discharge (l/min)	Water Feed System	Dimensions (mm)	Weight (kg)
AA00222	KYC-20A	3.5	Single Phase	0.25	Full-Voltage Starting	3.5	Self-priming	250 x 210 x 230	9
AA00223	KYC-40A	3.5	220V 50/60Hz	0.4	Full-Voltage Starting	7	Self-priming	325 x 255 x 240	17

*Specifications may be subject to change without notice
*KYOWA's products are patented, pay careful attention to imitations

GASOLINE ENGINE COLD WATER HIGH PRESSURE WASHER

- 3.6 fuel tank operates up to 2.5 hours
- High pressure hose maximum up to 300bar
- Stainless steel long gun with auto switch
- High performance plunger pump
- 3 meter inlet hose with filter
- Adjustable four types of nozzle for cleaning all kinds of stubborn stains (0°, 15°, 25°, and 40° drainage effect)
- Suitable for cleaning exterior building, street, stain removal, car wash; both commercial, and industrial

GP-200 PLUNGER PUMP

GASOLINE ENGINE COLD WATER HIGH PRESSURE WASHER



Stock Code	AA00007-1	Model No.	GP-200
Pressure	200bar / 2900psi	Flow	12lpm / 3.17Gpm
Power	Gasoline 7.5HP	Speed	3400rpm
Inlet	3M	Outlet	10M Hose
Gun	Long Gun	Nozzle	4 Quick Insert Nozzle
Weight	80kg	Size (cm)	85 x 54 x 65

HEAVY DUTY ELECTRIC POWERED HIGH-PRESSURE CLEANER

The Nesto High Pressure Cleaner delivers powerful cleaning performance with pressure up to 200 bar (2900 psi). Built with a durable electric motor, oil-resistant cables, and a high-pressure hose, it ensures

reliable operation in tough industrial and commercial environments. Compact, efficient, and easy to use, it's ideal for removing dirt, grease, and grime from various surfaces.

Accessories:

- 10m High Pressure Hose
- Water Inlet
- Pressure Gun



Model	HPC-152	HPC-203	HPC-204
Stock Code	AA00003-1 HPC-152	AA00004-1 HPC-203	AA00004-M HPC-204
Pressure	150bar / 2176psi	200bar / 2900psi	200bar / 2900psi
Flow	9 L / 10.8min	11 L / 12.8min	11 L / 4.8min
Power Consumption	2.2 KW / 3.0 HP	4.0 KW / 5.5 HP	4.0 KW / 5.5 HP
Power Supply (V)	220 V / 1Ph / 50 220 V / 1Ph / 60	380-415 V / 3Ph / 50	440 V / 3Ph / 60
Motor Spec (Rpm50/60Hz)	1400 / 1680	1450	1740
El-Cable, Oil Resistant	10m	10m	10m
High Pressure Hose	10m	10m	10m
Water Inlet Temp. Max	60°C	60°C	60°C
Weight	68kg	68kg	68kg
Dimensions	720 x 480 x 900	720 x 480 x 900	720 x 480 x 900

EJ-500 HEAVY DUTY ELECTRIC POWERED HIGH-PRESSURE CLEANER

This machine is designed to deliver clean water or non-aggressive water. Fast and efficient cleaning! EURO-JET 500 High Pressure Water Blaster offers you high performance and a design optimized for heavy duty use.

you the opportunity to solve an array of blasting tasks.

The Waterblasters are designed for industrial and for offshore use. All pump parts fittings and pipes in contact with water are made of non-corrosive materials. Together with the ceramic pistons, long life seals and stainless steel valves, it ensures long life and high durability.

The design of the surrounding frame safeguard the vital parts during transport and use, and the high performance gives

E-100L/1 ELECTRIC POWERED HIGH PRESSURE CLEANER



Accessories:

- Conical Spray Nozzle
- Stream Nozzle
- High Pressure Hose
- Trigger Gun
- Rotary Nozzle (Optional)
- Blasting Kit (Optional)

Stock Code	Model No.	Power Supply	Motor Speed	Flow Capacity	Motor Power	Working Pressure	Dimensions (mm)	Weight (kg)
AA00011-M (440V) / AA00011-1 (380V)	EJ-500	440V / 60 Hz or 380V / 50 Hz	1,750 RPM (60 Hz) / 1,450 RPM (50 Hz)	5.8 GPM / 22 LPM	30 HP / 22 kW	7,250 PSI (500 BAR)	1,244 x 506 x 1,141	300