

## Chipping Hammers

### NC • AA Series

Model No	Piston Dia.	Stroke	Blow	Overall	Weight	Air Consumption	Air Hose	Shank Size
NC-0S	20mm	45mm	3,000	280mm	2.4kg	0.35m <sup>3</sup> /min	9.5 3/8	12.7 x 47mm
NC-1S	28.5mm	26mm	3,000	355mm	5.5kg	0.55m <sup>3</sup> /min	12.7 1/2	17.5mm
NC-2S	28.5mm	51mm	2,600	395mm	6.1kg	0.6m <sup>3</sup> /min	12.7 1/2	17.5mm
NC-3S	28.5mm	76mm	2,300	440mm	6.5kg	0.6m <sup>3</sup> /min	12.7 1/2	17.5mm
NC-4S	28.5mm	102mm	1,800	478mm	6.9kg	0.65m <sup>3</sup> /min	12.7 1/2	17.5mm
AA-10S	24mm	51mm	2,800	295mm	4.2kg	0.4m <sup>3</sup> /min	12.7 1/2	17.5mm



NC-0S

AB00919 (SHINTO)  
AB00002 (NKS)



NC-1S

AB00003



NC-2S

AB00004



NC-3S

AB00005



AA-10S

AB00006




NC-4S

AB00978


### Shank Dimension (NC/AA Series)

Type No.	D ø mm	H 1 mm	I 1 mm	I 3 mm	d ø mm	d2 ø mm	F mm	I 2 mm	L mm
NC-0S	12.7	11	47	30	20	16	8	40	200
NC-1S	17.46	15	60	40	27	20	9	50	300
NC-2S									
NC-3S									
NC-4S									
NC-10S									

Rounded Shank

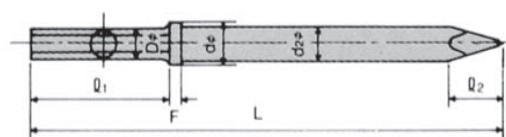

Hex Shank

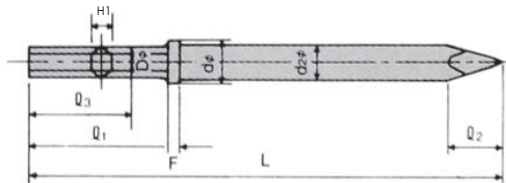

NSK