SWELOCK



Full Body Harness K451 – 1 back D-Ring Static Strength: 15kN Net wt: 0.70kg Approval: PSB / CE EN361



Full Body Harness K454S – 1 back & 2 front D-Ring(Steel) Wt: 0.70kg

K646-1C

& 1 Snap Hook

K615

12mm Dia Lanyard Rope c/w protection 1.8M Long

1.8M Shock Absorbing Lanyard

Dia.12mm c/w Two Big Hooks



COLOCK – 1 back D-Ring with reflective strip Static Strength: 15kN Net wt: 0.90kg Approval: PSB / CE EN361

AN00006













AN00015



AN00014



ALLINTON ENGINEERING & TRADING PTE LTD

274 331 Jalan Besar Singapore 208983 **T65** 6296 0679 **W** allinton.com.sg **E** sales@allinton.com.sg

Support Belt





























Guided Life Line 50M AN00027 30M AN00026

Retractable Fall Arrest Block

- Swelock Asia's fall arrest block permits the user to move in a normal way, but if a person has a fall the block locks immediately (operating speed about 1.5m/sec.) In a fall the pact force doesn't exceed 4kN.
- Tested and approved to EN360 and prEN1496 (CE approved)
- Arrest (Barking) force: 3.2kN < 6kN
- Arrest (Barking) distance : 639 mm < 1500mm
- Height of fall: 2 m; weight: 100kg
- EN 360 and prEN 1496 CE0299



AN00023

HPS 12m Fall AN00019

HPS 18m Fall AN00020

Tripod System

c/w Pully and work winch (wire Rope 20m Max. Load-250kg)

AN00021









Safety Industrial Footwear

The Professional Choice

Safety - Comfort - Durability

BS EN 345-1:1993 CERTIFIED NO: PC 007502 MS 1599:1998

CERTIFIED NO: PC 007501

ISO 9001:2000

















TIGER

276













































































































and anti-slip pad.




AN00247

Orange Fencing








































Safety Mirror

24" AN00259 18" AN00604 26" AN00605





No. 2F First Aid Kit

- Surgifix size 1-2 for hand, wrist, arm & elbow
- Surgifix size 1-2 for nana, wrist, arm & elbow Surgifix size 3-4 for knee, leg, foot & shoulder Surgifix size 5-6 for head, hip, thigh & axilla Singlefix finger bandages lodine solution B.P.

- Acriflavine solution 1:1000
- Panadol 30's
- Sodium bicarbonate powder B.P. Eye lotion Antiseptic lotion

- Antiseptic cream Absorbent gauze Absorbent lint Cotton wool

- Crepe bandages
 Triangular bandages
 Adhesive plaster 11/2" x 5 yds

For 10-50 persons



- Packs First Aid plasters 10's

- First Aid at work
- 24 Safety pins, assorted
 1 Constrictive bandages
 1 Dressing scissors
- Dressing forcepts

No. 61F First Aid Kit

- Surgifix size 1-2 for hand, wrist, arm & elbow
- Surgifix size 3-4 for knee, leg, foot & shoulder Surgifix size 5-6 for head, hip, thigh & axilla
- Singlefix finger bandages
 Antiseptic lotion & 1 Antiseptic cream
 Absorbent gauze & 18 Absorbent lint

- Absorbent gauze 1 yd
 Absorbent lint 1/2 oz & 36 Cotton wool
- Sodium bicarbonate powder B.P. Panadol 30's & 1 Eye lotion
- set Telescopic splints No. 2 lodine solution B.P. Acriflavine solution 1:1000 Crepe bandages

- Triangular bandages Adhesive plaster 1/2" x 5 yds

For 50-150 persons



1 pack First Aid Airway AN00262

- packs First Aid plasters 10's
- Constrictive bandage Dressing scissors & 1 forceps Kidney disy & 24 Safety pins
- Emergency eye wash bottle First Aid at work

No. 1F First Aid Kit (27 x 5 x 20 cm)

- 20 Adhesive dressings, Sterile

- Adnesive dressings, Sterile
 Eye pads No. 16. Sterile
 Triangular bandages
 Safety pins
 Medium dressings No. 8. Sterile
 Large dressings No. 9. Sterile
- Extra large dressings. Sterile



Double Fold Stretcher

For 20 persons

Pole Stretcher

Pole Stretchers are a minimal form of readliness. Lightweight yet strudy. Aluminium poles with International

Orange, vinyl-coated nylon covers.


Model: Single Fold


Made of heavy-duty tubular aluminium poles and rugged cross speader bars and aluminium feet.

Cross spreaders fold together for quick storage.



Model: Double Fold





ALLINTON ENGINEERING & TRADING PTE LTD

331 Jalan Besar Singapore 208983 280

Weight......13 lbs (6 kg) Load capacity.......280 lbs. (127 kg)
















AN00342 Department Work (MRTC)



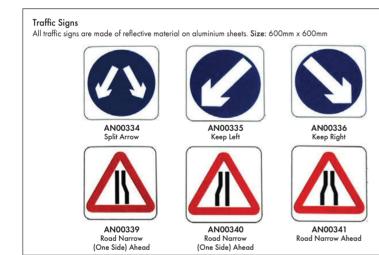





15/8/17 4:33 pm

Traffic Signs

All traffic signs are made of reflective material on aluminium sheets. Size: $600 \text{mm} \times 600 \text{mm}$



ital Work (PWD)



AN00348 ent Work (LTA)



Fast Lane Closed



Centre Lane Closed



Slow Lane Closed



AN00352 Right Bend



AN00353



AN00354 Reduce Speed Now



AN00355



AN00356



AN00357 No Entry



AN00358 Traffic Signal Ahe



AN00359 One Way (Arrow Left)



AN00360 One Way (Arrow Right)



AN00361 Two Way Traffic



AN00362 Two Way Traffic



AN00363 Height Limit



AN00364 Give Way



AN00365 Hump Ahead



AN00366 No Left Turn



AN00367



AN00368



AN00369 Work In Progress



AN00370 Speed Limit





AN00372



AN00373







AN00376



AN00377



AN00378





AN00380



AN00381





AN00384

AN00385

JTC AN00386

AN00387

AN00388



AN00390



AN00392



ALLINTON ENGINEERING & TRADING PTE LTD

282 331 Jalan Besar Singapore 208983

Traffic Signs

All traffic signs are made of reflective material on aluminium sheets. Size: 600mm X 600mm





(600 x 150mm)





AN00395 (900 x 600mm)





AN00396





4.5m

AN00403







AN00404



AN00405

Construction Site Signs

Sizes (Ht x Wd): 915 x 610 x 1.2mm (3ft x 2 ft x 1.2mm)



AN00406 Helmet Area With Proper Foot Wear (3ft X 2ft)



AN00410
All Visitors Must Report To The Site Office (3ft x 2ft)







AN00418



AN00422



AN00407 Danger-Keep Out! (4 Languages) (3ft x 2ft)



AN00411 Concealed Exit Ahead (3ft x 2ft)



AN00415 Pedestrians To The Left & Right (3ft x 2ft)



AN00419 Detour Right (3ft x 2ft)



AN00423



AN00408 Illegal Workers (5 Languages) (3ft x 2ft)



AN00412 No Trespassing (4 Languages) (3ft x 2ft)



AN00416 Pedestrians To The Right (3ft x 2ft)



AN00420 Safety First (4 Languages) (3ft x 2ft)



AN00424



AN00409 Work In Progress Drive Slowly (3ft x 2ft)



AN00413 Heavy Vechicles Turning Ahead (3ft x 2ft)



convenience Caused Is Regretted (3ft x 2ft) AN00417 Work In Progress In



AN00421 Work In Progress (3ft x 2ft)



AN00425

ALLINTON ENGINEERING & TRADING PTE LTD

Construction Site Signs

Material: Aluminium
Sizes (Ht x Wd): 915 x 610 x 1.2mm (3ft x 2 ft x 1.2mm)

RESTRICTED AREA ALL VISITORS MUST BE ACCOMPANIED AT ALL TIMES

AN00426

NOTICE TO ALL FOREIGN WORKERS
FOREIGN WORKERS ARE TO PRODUCE THEIR ORIGIN FOREIGN WORKERS ARE TO PRODUCE THEIR ORN
RK PERMITS WITHOUT DEMAND. FOREIGN WORKER
HOUT PERMITS ARE NOT ALLOWED ON THIS SITE.

(CHINESE TEXT) (MALAY TEXT) (TAMIL TEXT) (THAI TEXT) (BANGLADESHI TEXT)

AN00430



AN00434

ROADWORKS IN **PROGRESS**

AN00438



AN00427



WEAR AND 0 USE YOUR PERSONAL 0 PROTECTIVE EQUIPMENTS (1)

AN00435



AN00439



UPGRADING WORKS IN PROGRESS SORRY FOR ANY INCONVENIENCE CAUSED

AN00432

PLEASE KEEP GATE CLOSED AT ALL TIMES

AN00436

CAUTION **CABLE WORKS** IN PROGRESS

AN00440

DANGER-KEEP OUT! 危 險,請避開! BAHAYA-JANGAN DEKAT! அபாயம்-அடுகில்வராத்ர்கள்!

AN 00429



AN 00433

ROAD TEMPORARILY CLOSED

AN 00437

CAUTION **SEWER WORKS** IN PROGRESS

AN 00441

Construction & Industrial Safety Sign

Sizes (Ht x Wd): $S (180 \times 130 \text{mm})$, $M (350 \times 250 \text{mm})$, $L (710 \times 480 \text{mm})$

Material: Aluminium Sheet 1.2mm Thick.

Sign

Inks: Outdoor grade. UV & Weather resistance vinyl ink applied on surface by screen printing.

Sizes

Eye protection must be worn	S, M, L
Safety helmets must be worn in this area	S, M, L
Protective footwear must be worn in this area	S, M, L
Ear protectors must be worn in this area	S, M, L
Wear safety harness/ belt	S, M, L
All visitors must register at the Security Office	M
Keep all cylinders chained	M
Report all injuries at once	M
Hand protection must be worn in this area	S, M
Wear face shield	S, M
No admittance except authorised pesonnel	S, M, L
No smoking	S, M, L
No naked lights	S, M, L
Scaffolding incomplete. Do not use	M, L
No camera	S, M













AN00446











AN00450 AN00451









AN00455



ALLINTON ENGINEERING & TRADING PTE LTD

331 Jalan Besar Singapore 208983 284

Construction & Industrial Safety Sign

Sizes (Ht x Wd): S (180 x 130mm), M (350 x 250mm), L (710 x 480mm)

Material: Aluminium Sheet 1.2mm Thick.

Inks: Outdoor grade. UV & Weather resistance	vinyl ink applied on su	rface by screen print	ing.			
Sign	Sizes					
Danger highly flammable	S, M, L) ^)		\ \ \	\ \ \	
Danger high voltage	S, M, L					
Caution overhead load	M, L					
Danger heavy vehicles	M, L	Danger highly flammable	Danger high voltage	Caution overhead load	Danger heavy vehicles	Caution mind your head
Caution mind your head	M, L	AN00457	AN00458	AN00459	AN00460	AN00461
Caution. Work in progress	M, L					
Danger falling objects	M, L					
Danger high noise level	M		1 1 1 m	John John John John John John John John		
Danger zone	M	Caution Work in progress	Danger falling objects	Danger high noise level	Danger	Committee and in program
Caution, work in progress. Please keep away.	M	(- Indiana and	1000	-
Sorry for the inconvenience		AN00462	AN00463	AN00464	AN00465	AN00466
Stretcher	М	+10				
Smoking permitted in this area	M				Your first aider	Emergency
First aid	S, M, L				located at	equipment
Your first aider located at	M	Stretcher	Smoking permitted in this area	First aid		here
Emergency equipment here	М	AN00467	AN00468	AN00469	AN00470	AN00471
Fire fighting equipment inside	М		D 70			
Fire alarm call point	S, M	Fire				
Fire alarm	S, M	fighting		111		
Fire hose reel	S, M, L	equipment inside	Fire alarm call point	Fire alarm	Fire hose reel	Fire extinguisher
Fire extinguisher	S, M, L	AN00472	AN00473	AN00474	AN00475	AN00476

General Safety Signs

ther resistance vinyl sticker. Size: 250mm X 350mm. For other safety signs, Please enquire.







AN00718





AN00720





AN00722



AN00723 Protective Footwear



AN00724 Safety Helmet



AN00725 No Naked Lights



AN00726 Fire Extinguisher



AN00727 Danger High Voltage



AN00728 Eye Wash



AN00729 First Aid

ALLINTON ENGINEERING & TRADING PTE LTD

Portable Dry Powder Fire Extinguisher



AN00272

MODEL KP-1EN			
Capacity	1 KG		
Whole Height	310 MM		
Diameter of Body	90 MM		
Gross Weight	1.9 KGS		
Working Pressure	12 BAR		
Discharging Duration	8 SEC		
Shooting Range	3 M		
Fire Rating	5A:21B		

AN00274

MODEL KP-2EN			
2 KG			
395 MM			
110 MM			
3.58 KGS			
12 BAR			
8 SEC			
3 M			
8A:34B			

AN00273

MODEL KP-1EN (VH)		
Capacity	1KG	
Whole Height	310 MM	
Diameter of Body	90 MM	
Gross Weight	2.3 KGS	
Working Pressure	12 BAR	
Discharging Duration	8 SEC	
Shooting Range	3 M	
Fire Rating	5A:21B	

AN00275

7.1.10027.0		
MODEL KP-3EN		
Capacity	3KG	
Whole Height	430 MM	
Diameter of Body	130 MM	
Gross Weight	4.8 KGS	
Working Pressure	12 BAR	
Discharging Duration	10 SEC	
Shooting Range	4 M	
Fire Rating	13A:55B	



AN00275

Dry Powder Fire Extinguisher



AN00281

MODEL KP-4EN			
Capacity	3 KG		
Whole Height	480 MM		
Diameter of Body	140 MM		
Gross Weight	6.8 KGS		
Working Pressure	12 BAR		
Discharging Duration	20 SEC		
Shooting Range	6 M		
Fire Rating	13A70B		

VNUU384

AN00284			
MODEL KP-9EN			
Capacity	9 KG		
Whole Height	605 MM		
Diameter of Body	175 MM		
Gross Weight	13.08 KGS		
Working Pressure	12 BAR		
Discharging Duration	30 SEC		
Shooting Range	6 M		
Fire Rating	27A:144B		

AN00282

MODEL KP-6EN		
Capacity	6 KG	
Whole Height	510 MM	
Diameter of Body	161 MM	
Gross Weight	9.3 KGS	
Working Pressure	12 BAR	
Discharging Duration	20 SEC	
Shooting Range	6 M	
Fire Rating	21A:113B	

AN00288

AN00288			
MODEL KPK-9EN			
Capacity	9 KG		
Whole Height	605 MM		
Diameter of Body	175 MM		
Gross Weight	13.08 KGS		
Working Pressure	12 BAR		
Discharging Duration	30 SEC		
Shooting Range	6 M		
Fire Rating	144B		



CO2 FIRE EXTINGUISHER



AN00277

A11002//			
MODEL KC-2EN			
Capacity	2 KG		
Whole Height	510 MM		
Diameter of Body	115 MM		
Gross Weight	7.6 KGS		
Working Pressure	50 BAR		
Discharging Duration	12 SEC		
Shooting Range	3 M		
Fire Rating	21B		

AN00279

MODEL KC-6.8		
Capacity	6.8 KG	
Whole Height	850 MM	
Diameter of Body	152 MM	
Gross Weight	24 KGS	
Working Pressure	50 BAR	
Discharging Duration	25 SEC	
Shooting Range	4 M	
Fire Rating	B:C	

AN00278

A1100270	
MODEL KC-5EN	
Capacity	5 KG
Whole Height	660 MM
Diameter of Body	152 MM
Gross Weight	17.5 KGS
Working Pressure	50 BAR
Discharging Duration	20 SEC
Shooting Range	4 M
Fire Rating	55B

AN00280

AN00280	
MODEL KC-9)
Capacity	9 KG
Whole Height	1040 MM
Diameter of Body	152 MM
Gross Weight	30 KGS
Working Pressure	50 BAR
Discharging Duration	25 SEC
Shooting Range	4 M
Fire Rating	B:C



AN00280

ALLINTON ENGINEERING & TRADING PTE LTD

T65 6296 0679 **W** allinton.com.sg **E** sales@allinton.com.sg

286



WATER FIRE EXTINGUISHER

AN00283

MODEL 9W	
Capacity	9 LTR
Whole Height	620 MM
Diameter of Body	180 MM
Gross Weight	14 KGS
Working Pressure	14 BAR
Discharging Duration	60 SEC
Shooting Range	7 M
Fire Rating	13A



FOAM TYPE FIRE EXTINGUISHER

AN00285

MODEL 9F [AFFF]	
Capacity	9 LTR
Whole Height	620 MM
Diameter of Body	180 MM
Gross Weight	14 KGS
Working Pressure	14 BAR
Discharging Duration	60 SEC
Shooting Range	7 M
Fire Rating	13A:183B



WET CHEMICAL FIRE EXTINGUISHER

AN00289

MODEL KBFS-6	
Capacity	6 LTR
Whole Height	570 MM
Diameter of Body	165 MM
Gross Weight	11.7 KGS
Working Pressure	9 BAR
Discharging Duration	57 SEC
Shooting Range	3 M
Fire Rating	13A:75F

TROLLEY DRY POWDER FIRE EXTINGUISHER

AN00286

MODEL KP-25	
Capacity	25KG
Whole Height	900 MM
Diameter of Body	300 MM
Gross Weight	50 KGS
Working Pressure	15 BAR
Discharging Duration	30 SEC
Shooting Range	8 M
Fire Rating	ΔRC

AN00287

MODEL KP-50	
Capacity	50KG
Whole Height	1050 MM
Diameter of Body	300 MM
Gross Weight	80 KGS
Working Pressure	15 BAR
Discharging Duration	50 SEC
Shooting Range	9 M
Fire Rating	ABC

AN00296

MODEL KP-50C	
Capacity	50KG
Whole Height	1050 MM
Diameter of Body	300 MM
Gross Weight	80 KGS
Working Pressure	15 BAR
Discharging Duration	50 SEC
Shooting Range	9 M
Fire Rating	ABC



TROLLEY FOAM FIRE EXTINGUSHER

AN00304

MODEL KF-45S	
Capacity	45 LTR
Whole Height	1050 MM
Diameter of Body	300 MM
Gross Weight	89 KGS
Working Pressure	15 BAR
Discharging Duration	50 SEC
Shooting Range	9 M
Fire Rating	AB



TROLLEY CO2 FIRE EXTINGUISHER



AN01461

MODEL KC-9 ON TROLLEY	
Capacity	9 KG
Whole Height	1280 MM
Diameter of Body	152 MN
Gross Weight	40 KGS
Working Pressure	50 BAR
Discharging Duration	25SEC
Shooting Range	4 M
Fire Rating	B:C

AN00611

MODEL KC-22 & APPLICATOR	
Capacity	22 KG
Whole Height	1450 MM
Diameter of Body	250 MM
Gross Weight	65 KGS
Working Pressure	55 BAR
Discharging Duration	30 SEC
Shooting Range	6 M
Fire Rating	B:C

AN01230

MODEL KC-22	
Capacity	22 KG
Whole Height	1450 MM
Diameter of Body	250 MM
Gross Weight	65 KGS
Working Pressure	55 BAR
Discharging Duration	30 SEC
Shooting Range	6 M
Fire Rating	B:C

AN01231

MODEL KC-4	5		
Capacity	45 KG		
Whole Height	1610 MM		
Diameter of Body	270 MM		
Gross Weight	140 KGS		
Working Pressure	55 BAR		
Discharging Duration	40 SEC		
Shooting Range	6 M		
Fire Rating	B:C		



ALLINTON ENGINEERING & TRADING PTE LTD

Fire Hose Cabinet (Floor Mounted) Model: KSC-080-2 For 2 Hose

KSC-080-4 For 4 Hoses

Material: Mild Steel / Stainless Steel For Housing: Fire Hoses, Nozzle, Fireman Axe, Hydrant bar and Key.



Fire Hose Cabinet (Wall Mounted) Model: KSC-081-1 For 1 Hose KSC-081-2 For 2 Hoses

Material: Mild Steel / Stainless Steel For Housing Standby Fire Hose and Nozzle.



2 Way Pillar Hydrant Model: KPH-2W

KILLFIRE 2-Way Pillar Hydrant are manufactured to BS 750 and is complete with a Ø100m flange drilled inlet and two Ø65mm V thread outlets, cap and chain.

Material

Body: Cast Iron to BS 1452 Outlet Adaptor: Brass Hydrostatic Tested: 300 PSI



3 Way Pillar Hydrant

Model: KPH-3W

KILLFIRE 2-Way Pillar Hydrant are manufactured to BS 750 and is complete with a Ø150m flange drilled inlet and two Ø100mm BSRT male thread outlets, cap and chain.

Material

Body: Cast Iron to BS 1452 Outlet Adaptor: Brass Hydrostatic Tested: 300 PS



Hose Reel Cabinet Model: KSC-100

Material: EG Steel For Housing: Swing / Fixed Fire Hose Reel Drum



HOSE REEL NOZZLE

Model: KNR-20J Ø20MM **KNR-25J** Ø25MM

Hose Reel Nozzle are made of copper, alloy material and chromium plate finish.



Swing Type Hose Reels

KILLFIRE Swing Type Fire Hose Reels are designed and tested to BSEN 671 for reliability, performance. ease of installation. They can be used without alteration for mounting with inlet to left or right of the reel.

Units are tested at 20 bar without any sign of leaking or any visible distortion in any part.



AN00290

STOCK CODE	MODEL	TYPE
AN00290	KHS-1E	25mm Swing Type Hose Reel

FIXED TYPE HOSE REEL

KILLFIRE Fixed Type Fire Hose Reels are designed and manufactured for mounting on a flat wall with easy access and can be supplied with hose guide (optional) which allows hose to be drawn in any direction

Fire Hose Reels are manufactured to specification with Hydrostatic Pressure Tested at 20 bar without any sign of leaking or any visible distortion in any parts.

Fixed Hose Reels are manufactured in two sizes:



STOCK CODE	MODEL	TYPE
AN00292	KHF-20	20mm Fixed Type Hose Reel
AN00293	KHF-25	25mm Fixed Type Hose Reel
AIN00293	KHI-ZJ	23mm rixed Type nose keel

ALLINTON ENGINEERING & TRADING PTE LTD

T65 6296 0679 **W** allinton.com.sg **E** sales@allinton.com.sg

288

FIRE EXTINGUISHER CABINET

Model: KSC-090 L

Material: EG Steel

Finish: Epoxy Powder Coating For Housing Portable Fire Extinguishers

AN00301



Hoses Reel Hose Standard Length: 30m Red Colour

Stock Code	AN00297
MODEL	KHR-25E
Inner Dia	25mm
Wall thickness	3mm
Max Working Pressure	15 Bar
Bursting Pressure	45 Bar







Foam Inline Inductors

Model: Z2

Z2 with flow rate 200 ltr/at mixing rate 0-6% Z4 with flow rate 400 ltr/at mixing rate 0-6% Z8 with flow rate 800 ltr/at mixing rate 0-6% Inductor comes with a 3M suction hose



Low Expansion Foam Branchpipes

Model: S2

S2 with flow rate 200 ltr /min S4 with flow rate 400 ltr /min S8 with flow rate 800 ltr /min



Dry Chemical Powder for Fire Extinguisher 25 Kg



Industrial White Fire Hose

Stock Code	Model	Size (Dia)	Burst (Short Length)	Working		Approx. Coil Dia (30MTR Length)
AN01235	KHH 15	1 1/2"	550 PSI	190 PSI	9.9 kg	400mm
AN01236	KKH 20	2"	550 PSI	190 PSI	12.30 kg	405mm
AN01237	KHH 25	2 1/2"	550 PSI	190 PSI	14.40 kg	410mm
AN01238	KHH 30	3"	550 PSI	190 PSI	16.50 kg	425mm



John-Morris Type Instantaneous Branchpipe Jet Nozzle

Stock Code	Model	Nom Size	Connection	Weight (kg)
AN01239	KNJ-15-Cl38	1.5"	Males Instantaneous	0.65
AN01240	KNJ-20-CI52	2.0"	Males Instantaneous	1.10"
ANIO1241	VNII 25 CI45	2.5"	Malas Instantanas	1.4



ALLINTON ENGINEERING & TRADING PTE LTD

Spill Prevention and Secondary Containment Products

Workplace safety and environmental protection are challenges faced by Today's businesses. Safe handling, storing and transportation of materials must be carefully planned and implemented to prevent accidents and wastage without compromising on cost and productivity. Our range of spill prevention and secondary containment products seeks to do just that.



TSSBD4 AN01108

TSSBD4L AN01107



TSSBB1 AN01128



TSSBB2 AN01129



TSSBB4FN AN01109

Dimensions 1220 x 820 x 330mm Weight 26kg Sump 240L Max Load 650kg Dimensions 1280 x 1280 x 275mm Weight 35kg Sump 230L Max Load 1250kg Dimensions 1760 x 1350 x 710mm Weight 107kg Sump 1100L Max Load 1500kg Dimensions 2560 x 1350 x 510mm Weight 136kg Sump 1140L Max Load 2500kg Dimensions 1220 x 1220mm x 388mm Weight 40kg Sump 250L Load 3000kg

Pallet Racking Bund



Convert standard palet racking into bunded racking Prevent contamination of goods stored below Drain plug available for removal of spilled liquids Uses the "dead space" between beams Designed to provide easy access to pallets 100% polyethylene for high chemical resistance (racking not included)

TSSRB1

AN01112

Drum Racker Stacker



Save space
Can reclaim spilled material
Base holds 2 205L drums
Stackable design lets you stack up to 4 drums
Load Bearing Capacity UDL (kg) 1250kg
Racker (base) diemensions 139 x 125 x 49cm
Sump capacity 400 litres

Racker (base) TSSDB4 AN01178 Stacker TSSDBC AN01179

Compact Spill Deck Ramp



Moulded from polyethylene for extra strength Attaches to the Spill Deck for extra stability Compact size makes it ideal for confined areas Moulded grips to reduce slippage Suitable for all sizes of Spill Deck Dimensions 65 x 10 x 16.5cm Weight: 9kg Max Load 300kg

TSSBFR ANOI127

Heavy Load Spill Deck Ramp



Gentle incline easier for heavy loads.
Suitable for hand trolley and pallet jack.
Raised moulded grips to reduce slippage.
Seamless one piece design
Polyethylene construction for maximum durability
Dimensions: 174 x 100 x 16cm
Weight: 28kg
Max Load: 900kg

TSSBFR2 AN01126

Multi Spill Decks



TSSBF2 AN01121

2-Drum Spill Deck

Dimensions 126 x 86 x 15cm Weight 20kg Sump 150L

4-Drum Square Spill Deck



TSSBF4 **AN01119**

Dimensions 166 x 126 x 15cm Weight 40kg Sump 300L

4-Drum Inline Spill Deck



TSSBF4S AN01120

Dimensions 261 x 86 x 15cm Weight 48kg Sump 300L

ALLINTON ENGINEERING & TRADING PTE LTD

290 331 Jalan Besar Singapore 208983

SPILL Station

Mobile Drum Dispenser



TSSBT230 AN01196

TSSBT230 Dimensions (cm) 176L x 74W x 64H Weight: 44kg Sump: 230 litres Max load: 300kg

Safely move 205L drums from vertical to horizontal.

Genuine single person operation. No forklift required.

Moulded polyethylene for extra

strength
Double ratchet straps for extra load security







Spill Scooter



TSSPDDH AN01176

TSSPDDH ISSPIDH
Dimensions(cm): 72L x 72W x 99H
(including handle)
Weight: 15.5kg
Max load 300kg

Features : Sturdy handle and rotating lockable castors Avoid spills by taking your drum to

Collect incidental spills and prevent slip hazzards

Poly-Overpack



TSSOP1

Dimensions (cm):83Lx83Wx102H

- Ideal for hazardous drum transport and storage
 Moulded for easy grip and pick-up
 100% UV protected polyethylene
 Handling capacity: 292.5 kg
 Sump capacity: 360 litres

Free Standing Hand Operated Shower & Hand/Foot Operated Eyewash

Emergency Shower/Face/Eye/Wash

- Soft cleansing action
 Produce soft streams of aerated water to quickly cleanse contaminants
 Stainless steel construction withstands external locations

Eyewash unit with Stainless Steel bowl, aerated diffusers, flow regulator and push pad

Hand operated pull rod shower control

Stay-on 316 stainless steel ball valve

Conical profile cyclonic shower spray nozzle

Evewash drain piped to floor level

316 stainless steel tubing

Stainless steel bowl

Two year manufacurer's warranty

Pictured with optional signage, and Optiflex face and body wash

US Standard ANSI Z358.1-2014



All safety showers are fitted with the new generation Hughes valves ensuring years of trouble-free use

H-EXP18GS AN01197 H-EXP18GS-85G AN01200 H-EXP18GS-45G AN01198 H-EXP23GSV

ABS Capped Plastic Emergency Eyewash

• Soft cleansing action Simply pull forward to start the flow of flushing water

Ideal for high corrosion environments

Pictured with optional foot pedal

Also available as a wall mount option

Compliance: US Standard ANSI Z358.1-2014



Stainless Steel **Emergency Eyewash**

• Produce soft streams of aerated water to quickly cleanse contaminants

Ideal for marine and laboratory environments Full stainless steel bowl, valve and pedestal

Fitted with pictograph push flag

Available with option foot operation pedal (pictured)

Also available as a wall mounted eyewash

Compliance: US Standard ANSI Z358.1-2014



Portable Emergency Eye Wash



self-contained, gravity-fed eyewash station-certified to meet ANSI Z 358.1 1998 Requirements

- Eyewash station 34 Litre capacity
- Emergency eyewash signHanging bracketInstruction booklet

H-P400 AN01192 HP-400TJ AN01193 H-STD289 AN01194



AN01195 EWB947/12 AN01196

947ml Buffered Isotonic Saline Eyewash Bottle

H-STD85GSP

AN01186

If your eyes become contaminated with particles or chemicals, your first response can mean the difference between being able to see or permanent eye damage.

Opto-Pharm Eye Wash from Spill Station is a sterile buffered isotonic solution specifically formulated to enhance eye comfort by irrigating, flushing and cleaning without interfering with the natural functions.

Opto-Pharm Eye Wash is formulated to provide optimum first response eye and

The functional wall station ensures your eye-wash is always nearby, accessible

The exclusive eyewash diffuser cup fits comfortably on the eye and ensures an even flow of flushing solution.

Simply twist the lid and start treatment

- State of the art Blow-Fill-Seal equipment ensures safety of product. In house QA & QC laboratories.
- Full 4 year shelf life on Eye Wash range.(from manufacturing date) Stability

ALLINTON ENGINEERING & TRADING PTE LTD

331 Jalan Besar Singapore 208983 T65 6296 0679 W allinton.com.sg E sales@allinton.com.sg Safety

Safety Cabinets

Safety storage cabinets serve several critical functions:

- Safety contain hazardous chemicals to reduce the risk of fire, protecting both personnel and facilities.
- Identify, organize, and segregate dangerous liquids Offer compliance with federal OSHA regulations and state and local fire codes.
- Improve efficiency by allowing solvent to be stored near the points of use Improve security with keyed locking mechanism


Made from 1.2mm zinc coated steel, the Total Containment range of safety cabinets are built to last

10 years Manufactures Limited Warranty.



50mm Flash Arrester Vent

Fitted into side walls for venting of cabinets where required. Also includes a proven flash arrester in each vent with sealed enclosure in the cavity between walls. Each vent is supplied with resealable metal caps



Heavy Duty Perforated Steel Shelves

1.6mm thick perforated galvanised steel shelves provide added strength (up to 120kg) and free air movement within the cabinet.



New recessed handle with key lock to eliminate potential damage from heavy knocks.

FLAMMABLE



Non-sparking Latches

Spring loaded spark-proof 3 point latching door mechanism for fault free latching action.



FLAMMABLE

Continuous Piano Hinge

Continuous piano hinges for reliability of action.



Powder Coat Finish

Zinc Coat

1.2mm Galvanised

Steel

Rounded Corners

All doors have rounded corners for added safety.





Shelves

90mm shelving omcre,emts amd large easy fit shelf hooks for extra strength





Levelling Feet

Each cabinet is fitted with 4 levelling feet for stable positioning on uneven surfaces.



NFPA

OSHA

Stock Code Construction		Сар	acity	Height	Width	Depth	
STOCK Code	Code	Construction	Litres	Gallons	mm	mm	mm
AN01442	FC1D15	1 door, 1 shelf	15	4	630	435	436
AN01443	FC1D45	1 door, 1 shelf	45	12	960	595	460
AN01444	FC1D57	1 door, 1 shelf	57	15	1190	595	460
AN01445	FC1D83	1 door, 3 shelf	83	22	1720	595	460
AN01446	FC1D204	1 door, 3 shelf	204	54	1720	595	460
AN01447	FC2D114	2 door, 1 shelf	114	30	1190	1090	460
AN01448	FC2D170	2 door, 2 shelf	170	45	1720	1090	460
AN01449	FC2D227	2 door, 2 shelf	227	60	1720	860	860
AN01450	FC2D340	2 door, 2 shelf	340	90	1720	1090	860

size available in Corrosive, Toxic classes also.

ALLINTON ENGINEERING & TRADING PTE LTD

292 331 Jalan Besar Singapore 208983



AN01024

SK20SF 20 Litre General Purpose Spill Kit

- 15L Bag Spill Fix Absorbent
- 1200mm General Purpose Boom
- General Purpose Absorbent Pads Contaminated Waste Bags Oil Resistant Gloves 15

- Disposable Apron Zip-top Yellow Nylon Bag Instruction Sheet

AN01036

SK20GP 20 Litre General Purpose Spill Kit

- 1200mm General Purpose Boom General Purpose Absorbent Pads Contaminated Waste Bags
- Oil Resistant Gloves
- Disposable Apron
 Zip-top Yellow Nylon Bag
- Instruction Sheet

AN01025

SK40SF 40 Litre General Purpose Spill Kit

- 15L Bag SpillFix Absorbent 1200mm General Purpose Boom
- General Purpose Absorbent Pads Contaminated Waste Bags
- Oil Resistant Gloves

- Disposable Apron
 Zip-top Orange Nylon Bag
 Instruction Sheet

AN01037 SK40GP 40 Litre General Purpose Spill Kit

- 1200mm General Purpose Boom General Purpose Absorbent Pads Contaminated Waste Bags

- Oil Resistant Gloves Disposable Apron
- Zip-top Orange Nylon Bag Instruction Sheet

AN01041

AN01040

AN01064

SK40EA 40 Litre Hazchem Spill Kit

SK20EA 20 Litre Hazchem Spill Kit 1200mm Hazchem Absorbent Boom Chemical Absorbent Pads

Contaminated Waste Bags Neoprene Gloves Disposable Apron

Zip-top Yellow Nylon Bag Instruction Sheet

SK20W 20 Litre Oil Only Spill Kit

1200mm Oil Absorbent Boom Oil Absorbent Pads
Contaminated Waste Bags

- 1200mm Hazchem Absorbent Boom
- Hazchem Absorbent Pads Contaminated Waste Bags

Oil Resistant Gloves

Instruction Sheet

Disposable Apron
Zip-top Yellow Nylon Bag

- Neoprene Gloves
- Disposable Apron
- Zip-top Blue Nylon Bag
- Instruction Sheet

AN01065

SK40W 40 Litre Oil Only Spill Kit

- 1200mm Oil Absorbent Boom Oil Absorbent Pads Contaminated Waste Bags

- Oil Resistant Gloves Disposable Apron Zip-top Red Nylon Bag
- Instruction Sheet

AN01026

SK100SF 100 Litre General Purpose Spill Kit

- 1 50L Bag Spill Fix Absorbent 8 1200mm General Purpose Boom 100 General Purpose Absorbent Pads 5 Contaminated Waste Bags 2 Oil Resistant Gloves

- Disposable Apron 140L Spill Bin with Wheels Instruction Sheet

AN01038

SK100GP 100 Litre General Purpose Spill Kit

- 1200mm General Purpose Boom
- 100 General Purpose Absorbent Pads
 5 Contaminated Waste Bags
 2 Oil Resistant Gloves

- Disposable Apron 140L Spill Bin with Wheels
- Instruction Sheet

AN01042

SK100 EA 100 Litre Hazchem S ill Kit

- 8 1200mm HazchemAbsorbent Boom 100 Hazchem Absorbent Pads
- Contaminated Waste Baas

- Neoprene Gloves
 Disposable Apron
 140L Spill Bin with Wheels
- Instruction Sheet

AN01066

SK100W 100 Litre Oil Onl S ill Kit

- 1200mm Oil Absorbent Boom
- 100 Oil Absorbent Pads
 5 Contaminated Waste Bags
- Oil Resistant Gloves
- Disposable Apron 140L Spill Bin with Wheels
- Instruction Sheet

AN01043

SK200 EA 200 Litre Hazchem Spill Kit 15 1200mm Hazchem Absorbent Boom

- 200 Hazchem Absorbent Pads
- 10 Contaminated Waste Bags
- Neoprene Gloves Disposable Apron
- 240L Spill Bin with Wheels
- Instruction Sheet

AN01229

SK200W 200 Litre Oil Onl S ill Kit

- 15 1200mm Oil Absorbent Boom
- 200 Oil Absorbent Pads
 10 Contaminated Waste Bags
- Oil Resistant Gloves
- Disposable Apron 240L Spill Bin with Wheels
- Instruction Sheet



OIL FUEL SPILE

AN01027

SK200SF 200 Litre General Purpose Spill Kit

- 50L Bag Spill Fix Absorbent 1200mm General Purpose Boom
- 150 General Purpose Absorbent Pads10 Contaminated Waste Bags2 Oil Resistant Gloves
- 2
- Disposable Apron 240L Spill Bin with Wheels Instruction Sheet

AN01039 SK200GP 200 Litre General Purpose Spill Kit

- 15 1200mm General Purpose Boom
- 200 General Purpose Absorbent Pads 10 Contaminated Waste Bags
- Oil Resistant Gloves Disposable Apron 240L Spill Bin with Wheels
- Instruction Sheet

Custom Sized Spill Kits and Refill Kits are Available

ALLINTON ENGINEERING & TRADING PTE LTD

All Purpose Absorbent



MS-15 (15kg) AN01022

- New Zealand Zeolite
 Large 22ft (appox 15kg) bag
 Gritty 'Kitty Litter' type material
 Inert doesn't react
 Absorbs vapors

SpillFix Floor Sweep





OA50L (50lit) AN01018 OA15L (15lit) AN01020

Onto the part of t

Hazchem Absorbents-Pads-Rolls-Booms




CP303 Sukerup Synthetic Chemical Absorbents, Chemical Pad, 400gsm AN01044
CB330 Chemical Boom 3.0M x 75mm 10 packs AN01051

- Made from 100% Virgin Polypropylene.
 Available in Light weight or Heavy weight.
 Yellow-Chemical, Grey General Purpose and White Oil/Fuel Only.
 A80mm X 430mm Dimpled and Perforated
 Pads, Socks, Pillows, Booms and Rolls also Available.



Stock Code	SPILL STATION GENERAL		Size	Colour		Absobency	Packing
Slock Code	PURPOSE ABSORBENTS		3126	Colour		Absobelicy	I deking
AN01028	GP403	GENERAL PURPOSE PADS-400GSM	480x430mm	GREY	COVER STOCK DIMPLED PERF	166 litre	100/BALE
AN01029	GP410	GENERAL PURPOSE PADS-200GSM	480x430mm	GREY	COVER STOCK DIMPLED PERF	166 litre	100/BALE
AN01031	GR411	GENERAL PURPOSE ROLL-200GSM	50Mx500mm	GREY	COVER STOCK DIMPLED PERF	92 litre	EACH
AN01032	GR412	GENERAL PURPOSE ROLL-200GSM	50Mx1M	GREY	COVER STOCK DIMPLED PERF	182 litre	EACH
AN01033	GC405	GENERAL PURPOSE PILLOW	450X450mm	GREY		56 litre	10/BALE
AN01034	GB412	GENERAL PURPOSE BOOM	1.2Mx75mm	GREY		56 litre	10/BALE
AN01035	GB430	GENERAL PURPOSE BOOM	3.0Mx75mm	GREY		112 litre	10/BALE
	SPILL STATION						
	CHEMICAL ABSORBENTS						
AN01044	CP303	CHEMICAL PADS-400GSM	480x430mm	YELLOW	COVER STOCK DIMPLED PERF	166 litre	100/BALE
AN01046	CP310	CHEMICAL PADS-200GSM	480x430mm	YELLOW	COVER STOCK DIMPLED PERF	166 litre	100/BALE
AN01047	CR311	CHEMICAL ROLL-200GSM	50Mx500mm	YELLOW	COVER STOCK DIMPLED PERF	70 litre	EACH
AN01048	CR312	CHEMICAL ROLL-200GSM	50Mx1M	YELLOW	COVER STOCK DIMPLED PERF	140 litre	EACH
AN01049	CC305	CHEMICAL PILLOW	450X450mm	YELLOW		56 litre	10/BALE
AN01050	CB312	CHEMICAL BOOM	1.2Mx75mm	YELLOW		56 litre	10/BALE
AN01051	CB330	CHEMICAL BOOM	3.0Mx75mm	YELLOW		112 litre	10/BALE
	SPILL STATION OIL/						
	FUEL ABSORBENTS						
AN01052	WP203	OIL/FUEL PADS-400GSM	480x430mm	WHITE	COVER STOCK DIMPLED PERF	166 litre	100/BALE
AN01053	WP210	OIL/FUEL PADS-200GSM	480x430mm	WHITE	COVER STOCK DIMPLED PERF	166 litre	100/BALE
AN01057	WR211	OIL/FUEL ROLL-200GSM	50Mx500mm	WHITE	COVER STOCK DIMPLED PERF	92 litre	EACH
AN01058	WR212	OIL/FUEL ROLL-200GSM	50Mx1M	WHITE	COVER STOCK DIMPLED PERF	182 litre	EACH
AN01059	WC205	OIL/FUEL PILLOW	450X450mm	WHITE		90 litre	16/BALE
AN01060	WB212	OIL/FUEL BOOM	1.2Mx75mm	WHITE		70 litre	10/BALE
AN01061	WB230	OIL/FUEL BOOM	3.0Mx75mm	WHITE		140 litre	10/BALE
AN01062	WB222	OIL/FUEL FLOATING BOOM	3.0Mx125mm	WHITE	Snaphook and poly Rope	224 litre	4/BALE
AN01069	WB201	OIL/FUEL FLOATING BOOM	3.0Mx200mm	WHITE	Snaphook and poly Rope	280 litre	4/BALE

Quickbund Portable Bunding



Quickbund Portable Bunding							
Stock Code Item Code Dimensions Capacity Pack Size Weigh							
AN01134	TSSQB1	1.9x1.9x0.3m	1,000L	600x700x100mm	10kg		
AN01135	TSSQB2	2.5x2.5x0.3m	2,000L	700x700x100mm	20kg		
AN01136	TSSQB3	4.1x2.5x0.3m	3,000L	700x700x150mm	26kg		
AN01137	TSSQB4	3.2x1.9x0.3m	1,800L	700x700x100mm	19kg		
AN01138	TSSQB5	3.2x3.2x0.3m	3,000L	700x700x150mm	26kg		
AN01139	TSSQB6	8.5x4.5x0.3m	11,400L	800x900x300mm	67kg		

ALLINTON ENGINEERING & TRADING PTE LTD

331 Jalan Besar Singapore 208983 294

Marine / Sopep Spill Kits

Regulation 37 of MARPOL Annex I requires that oil tankers of 150 gross tonnage and above and all ships of 400 gross tonnage and above carry an approved Shipboard Oil Pollution Emergency Plan (SOPEP).

As a part of this contingency planning, vessels under 400' require a 7 barrel (11 OOL) Marine Spill Kit. Vessels over 400' require a 12 barrel (1900L) marine Spill Kit.

These spill kits contain a variety of oil only absorbents and PPE for addressing shipboard spills.

SOPEP=Shipboard Oil Spill Pollution Emergency Plan



Stock Code		AN01068	AN01218
Components	Size	SK1100OF	SK1900OF
Oil Absorbent Marine Boom	125mm x 3m	6	10
Oil Absorbent Pads	480x430mm	500	800
Oil Absorbent Roll	50m x 500mm	1	2
Oil Absorbent Pillows	450x450mm	15	22
Disposable Overalls		2	2
Oil Resistant Gloves		2	2
Splash Resistant Goggles		2	2
Contaminated Waste Bags		10	16
Lockable Weather-proof Container	1000 Litre	1	
Lockable Weather-proof Container	1400 Litre		1
Absorbent Capacity (Litres)		1100L	1900L
Absorbent Capacity (Barrels)		7 Barrel	12barrel

Robund Bunding Solution

Converting any area, or even your whole workshop or warehouse, into a securely bunded area has just become simple.

Unlike concrete and rubber alternatives, this new generation urethane bunding will not chip, split or crack.

Each kit comes complete with sealant adhesive and masonry anchors and step-by-step instructions

Pieces can be easily cut to size with a fine-tooth saw.





ALLINTON ENGINEERING & TRADING PTE LTD