


Kanazawa Lever Hoist - HRH Series

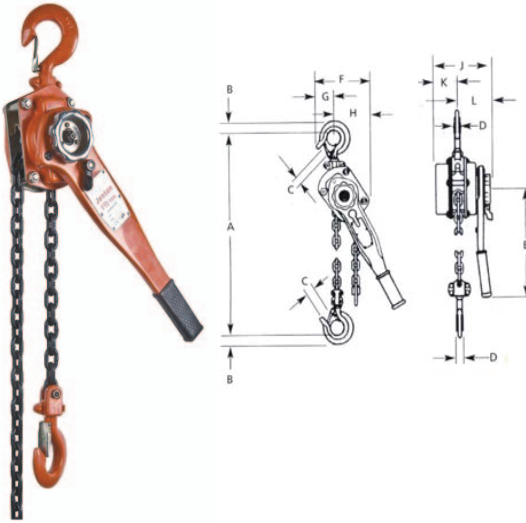


Stock Code		AQ01072	AQ01073	AQ01074	AQ01075	AQ01077	AQ01078
Capacity	ton	0.5	0.75	1	1.5	3	6
Standard lift	m	1	1	1.5	1.5	1.5	1.5
Proof test load	KN	4	11	1.5(T)	22	44	88
Headroom (drawn close up)	mm	240	321		376	475	495
Effort required to lift rated load	kg	26	15		23	30	33
No. of columns of load chain		1	1	1	1	1	2
Load chain	mm	4 x 12	6 x 18	6 x 3	8 x 24	10 x 30	10 x 3
Dimensions mm	A	240	321		376	475	495
	B	23	23.8		28.6	42.9	50.8
	C	26	28.5		31.8	39.7	43
	D	13	17.5		20.6	31.8	34.5
	E	150	279		413	413	413
	F	55	111	135	121	191	191
	G	25	56		60	86	94
	H	30	56		60	106	106
	J	90	151	155	175	200	200
	K	20	60	88	76	86	86
	L	70	90		100	116	116
Net weight	kg	2.3	6.8	7	12	20	30

Features

- Rugged steel body construction
- Light weight, compact and portable
- Short 360° rotating handle with low handle effort
- Easy free chain pull
- Impact resistant
- Latch-type swivel hooks
- High-tensile alloy chain
- Hook opening before chain break

Cable Puller

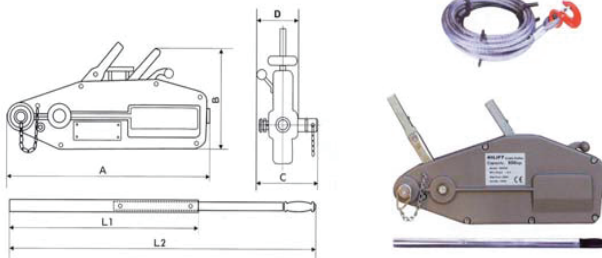

Stock Code		AQ01115	AQ01116	AQ01117	
Rated Capacity		kg	800	1600	3200
Rope advance per full stroke cycle			60	60	40
Rope Diameter		mm	8.4	11.5	16
Lever pull at rated load		daN	24	30	50
Proof Test Load		daN	1200	2400	4800
Net Weight (Without cable)		kg	7	14	21
Dimensions		A	430	545	680
		B	240	270	330
		C	64	102	116
		D	60	97	110
L1		mm	-	800	800
L2		mm	800	1200	1200

Kanazawa Bearing Swivel

(Eye - Eye)



AQ01118

Stock Code	Size	S.W.L	Net Wt (kg)
AQ01118	KJJ-101	1 T	1.9
AQ01119	KJJ-102	2 T	2.5
AQ01120	KJJ-103	3 T	4.2
AQ01121	KJJ-105	5 T	8
AQ01122	KJJ-106	10 T	20

Kanazawa Bearing Swivel

(Eye - Jaw)



AQ01123

Stock Code	Size	S.W.L	Net Wt (kg)
AQ01123	KEJ-101	1 Ton	1.9
AQ01124	KEJ-102	2 Ton	2.5
AQ01125	KEJ-103	3 Ton	4.1
AQ01126	KEJ-105	5 Ton	7.4