

KANAZAWA Hand-Hydraulic Stacker

- Ideal for the occasional application of stacking and transporting palletised loads.
- Can be used in many applications with different attachments.
- Available in lifting capacities from 500kg to 1500kg with lifting height 1.600mm.
- Safety control handle with the functions: lifting-driving-lowering, double-action hand pump with separate pump lever from 1200kg.
- Powerful hydraulic unit with large stroke for every pump action, protected by pressure relief valve.
- Lowering speed can be finely metered for sensitive lowering of the load.
- Mast welded from precision profiles.
- Robust frame with two load and two steer rollers, retention is by a parking device.

Stock Code	Model No.	Rated Load kg	Load Center mm	Fork Length mm	Max. width of Fork mm	Lifting Speed mm	Hand Force kg	Outside Side mm	Dead weight kg
AQ01135	HHS 05/15	500	400	800	850	≥35	23	1350 x 1020 x 1900	190
AQ01136	HHS 10/16	1000	475	950	976	≥25	21	1380 x 1020 x 2000	200
AQ01137	HHS 15/16	1500	475	950	976	≥20	40	1400 x 1020 x 2000	265



AQ01135

KANAZAWA Battery Stacker

- Suitable for occasional application of stacking and transporting palletised loads, also in confined areas.
- Can be used in many applications with different attachments.
- Available in lifting capacities up to 1500kg and maximal fork height 3500mm.
- Easy to operate via tie-rod guides to both steer wheels.
- Compact electric/hydraulic lifting device, overload protection and finely metered lowering of load through pressure relief valve and adjustable lowering valve.
- Mast welded from precision profiles, fork carriage with maintenance free guide rollers.
- Robust frame with two load and two steer rollers, retention is by a parking device.
- Battery and battery charger are supplied with the unit.

Stock Code	Model No.	Rated Load kg	Lifting Height mm	Load Center mm	Fork Length mm	Max. Width of Fork mm	Lifting Speed cm/s	Motor Power kW	Battery mm	Battery Charger	Dead Weight kg
AQ01138	HES 05/15	500	1500	400	800	850	10	0.8	90AH/12V	15AH/12V	150
AQ01139	HES 10/16	1000	1600	475	950	970	8	1.6	150AH/12V	15AH/12V	212
AQ01140	HES 15/16	1500	1600	475	950	970	10	1.6	150AH/12V	15AH/12V	285




AQ01138

KANAZAWA Crane Fork

- All the crane forks are in conformity with Europe.
- Union safety standard.
- Four-insurance to avoid crack.
- All the spare parts are free-maintenance.
- For round goods, only close up the forks.
- Adjust the fork distance according to the size of tray.
- Proof factory tested with 1.5 times the rated capacity.
- Manufactured according to EU machinery directive 98/37/EC.

Stock Code	Model No.	Type	WLL t	Weight kg	Adjusting range mm	Effective Height mm	Length of Fork mm	Fork Cross Section mm	Height mm
AQ01155	HCF 1.0m	m: Manual weight balancer	1.0	110	350-900	1100	1000	100 x 30	1390
AQ01156	HCF 1.5m		1.5	130	350-900	1300	1000	100 x 40	1600
AQ01157	HCF 2.0m		2.0	170	400-900	1300	1000	120 x 40	1640
AQ01158	HCF 3.0m		3.0	210	450-900	1300	1000	120 x 50	1670
AQ01159	HCF 5.0m	mh: Manual weight balancer, adjustable height	5.0	290	530-1000	1300	1000	150 x 60	1700
AQ01160	HCF 1.0mh		1.0	130	350-900	1100-1600	1000	100 x 30	1390-1890
AQ01161	HCF 1.5mh		1.5	150	350-900	1300-2000	1000	100 x 40	1600-2300
AQ01162	HCF 2.0mh		2.0	200	400-900	1300-2000	1000	120 x 40	1640-2340
AQ01163	HCF 3.0mh	as: Automatic weight balancer	3.0	250	450-900	1300-2000	1000	120 x 50	1670-2370
AQ01164	HCF 5.0mh		5.0	370	530-1000	1300-2000	1000	150 x 60	1700-2400
AQ01165	HCF 1.0as		1.0	120	350-900	1100	1000	100 x 30	1420
AQ01166	HCF 1.5as		1.5	140	350-900	1300	1000	100 x 40	1650
AQ01167	HCF 2.0as	ahs: Automatic weight balancer, adjustable height	2.0	195	400-900	1300	1000	120 x 40	1855
AQ01168	HCF 3.0as		3.0	235	450-900	1300	1000	120 x 50	1720
AQ01169	HCF 5.0as		5.0	310	530-1000	1300	1000	150 x 60	1710
AQ01170	HCF 1.0ahs		1.0	140	350-900	1100-1600	1000	100 x 30	1420-1920
AQ01171	HCF 1.5ahs	ahs: Automatic weight balancer, adjustable height	1.5	165	350-900	1300-2000	1000	100 x 40	1650-2350
AQ01172	HCF 2.0ahs		2.0	220	400-900	1300-2000	1000	120 x 40	1655-2355
AQ01173	HCF 3.0ahs		3.0	280	450-900	1300-2000	1000	120 x 50	1720-2420
AQ01174	HCF 5.0ahs		5.0	380	530-1000	1300-2000	1000	150 x 60	1710-2410

Manual Weight Balancer
AQ01155

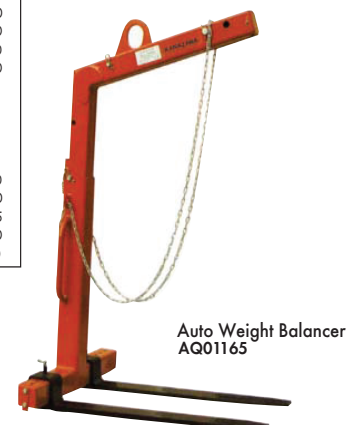

Auto Weight Balancer
AQ01165